

1

SPECTRA B100STR

Xenon Strobe Beacon

1J @ 0.75Hz

IP Rating: IP65

Temp: -25°C to +50°C

Unit weight: 100g DC, 105g AC

CE, UKCA



Dimensions : Ø60 x 65.5mm

Cable entry: Plugable 2.5mm² terminals

x = Lens colour

R = Red

B = Blue

Y = Yellow

A = Amber

G = Green

C = Clear

Order code Voltage
B100STR030B/x 10-30V DC
135mA @24V DC

B100STR115B/x 115V AC 30mA
B100STR230B/x 230V AC 20mA

Mountings

Panel mount Ø37mm (PG29)

D142-00-001-IS Issue 1



Sheet 1 of 1
19/01/2023

Tel : +44 (0)20 8743 8880
www.e2s.com



3

SPECTRA B100STR

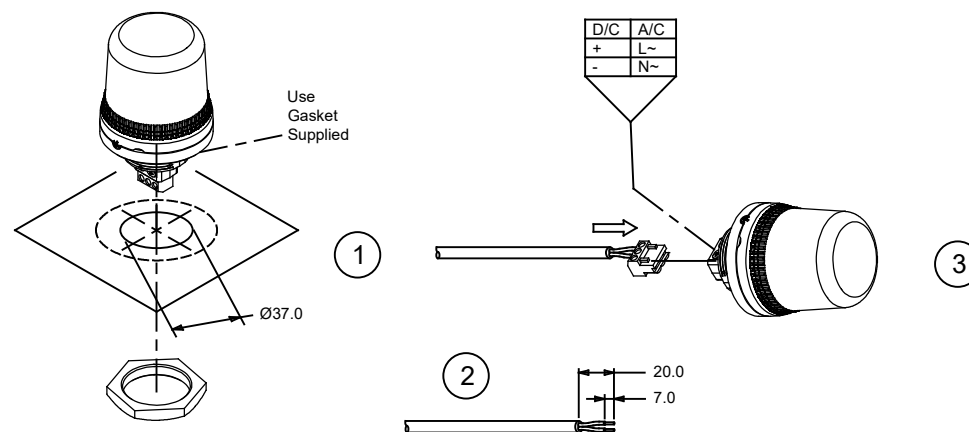

Dimensions in mm

2

⚠ ATTENTION: Installation must be carried out by an electrician in compliance with the latest codes and regulations.

⚠ ATTENTION: Disconnect from power source before installation or service to prevent electric shock.

⚠ ATTENTION: On strobe beacons allow a minimum of 2 minutes for hazardous high voltage to discharge from unit.

⚠ ATTENTION: Lens on unit will be hot allow to cool prior to removal.