

D2xC3 LED/Xenon & Horn Alarm Bar

The D2xC3 is an integrated stack assembly comprised of either high output LED or Xenon Strobe beacons with an alarm horn sounder from the D2x family of globally approved Class I/II Div 2 and Zone 2/22 audible and visual warning signals.

The compact, close coupled hazardous location alarm bar assembly is ideal for applications where combined visual signals are required to provide multiple warnings. The Ex ec, non-sparking, D2xC3 features a preinstalled cable loom with a large termination area in the first beacon. An optional junction box can be specified if required. The innovative mounting lug connectors remove the need for a back plate and the optional stainless steel duty labels can be field orientated to allow the assembly to be mounted either horizontally or vertically.

Features

- Private mode fire use & General signalling UL464/UL1638
- Globally approved to UL, cUL, ULC, IECEx and ATEX
- Available with LED and/or Xenon Strobe beacons
- Integrated high output alarm horn sounder up to 116dB(A)
- Choice of 64 alarm tone frequencies with 4 stages
- Automatic synchronisation
- Factory assembled with integrated cable loom
- Available with or without junction box
- LM6 marine grade aluminium enclosure
- Optional stainless steel duty labels
- Ingress protection Type 4/4X/3R/13, IP66
- High impact resistant glass lenses
- 316 (A4) stainless steel lens guards as standard
- Field replaceable lens colour filters
- Supplied with haz loc rated stopping plugs

Approvals

- UL/cUL File ref: E245313/E230764
- IECEx certificate: IECEx ULD 14.0004X
- ATEX certificate: DEMKO 14 ATEX 4786493904X
- CSFM listing: 7300-2279:0500
- Ex EAC certified: EAC RU C GB.AA71.B.00273/20

Coding

- NEC/CEC:
 - Class I Div 2 ABCD T1/T2D/T3C Ta -40°C to +50°C (T2: +45°C)
 - Class II Div 2 FG T4A/T5/T6 Ta -40°C to +50°C
 - Class III Div 1&2 Ta -40°C to +50°C
 - NEC:
 - Class I Zone 2 AEx ec IIC T1/T2/T4 Gc (Ta -40°C to +50°C)
 - Zone 22 AEx tc IIIC 105°C Dc (Ta -40°C to +50°C)
 - CEC:
 - Class I Zone 2 Ex ec IIC T1/T2/T4 Gc X (Ta -40°C to +50°C)
 - Zone 22 Ex tc IIIC 105°C Dc (Ta -40°C to +50°C)
 - IECEx & ATEX:
 - II 3G Ex ec IIC T1/T2/T4 Gc (Ta -40°C to +50°C)
 - II 3D Ex tc IIIC 105°C Dc (Ta -40°C to +50°C)
- Coding dependent upon assembly contents, see component product details



Specification

Component: D2xB1LD2 LED Beacon

Product data: D2xB1LD2: www.e2s.com/1-31-065

Source: Array of 4 x High Power Cree® LED's

Eff. Intensity cd: 73.4 cd UL 1638 Private mode fire

Eff. Intensity cd: 180 cd UL 1638 General signalling

Peak Intensity cd: 300,000 cd

Eff. Intensity cd: 87 cd High power steady

LED life: >60,000 hours

Flash rate: Synchronized 1Hz, 1.3Hz and 2Hz flash rates

Component: D2xB1X10 10J Xenon Strobe Beacon

Product data: D2xB1X10: www.e2s.com/1-31-050

Energy: 10 Joules (10Ws)

Flash rate: 1Hz (60 fpm)

Peak Candela: 1,000,000 cd – calculated from energy (J)

Eff. Intensity cd: 500 cd – calculated from energy (J)

Peak Candela: 101,784 cd* – measured ref. to I.E.S.

Eff. Intensity cd: 288.8 cd* – measured ref. to I.E.S.

Component: D2xB1X05 5J Xenon Strobe Beacon

Product data: D2xB1X05: www.e2s.com/1-31-040

Energy: 5 Joules (5Ws)

Flash rate: 1Hz (60 fpm)

Peak Candela: 500,000 cd – calculated from energy (J)

Eff. Intensity cd: 250 cd – calculated from energy (J)

Peak Candela: 33,410 cd* – measured ref. to I.E.S.

Eff. Intensity cd: 94.78 cd* – measured ref. to I.E.S.

Component: D2xS1 Alarm Horn Sounder

Product data: D2xS1: www.e2s.com/1-32-025

Maximum output: 116dB(A) @ 1 metre [107dB(A) @ 10ft/3m]

Nominal output: 112dB(A) @ 1m +/- 3dB – Tone 2 [103dB(A) @ 10ft/3m]

No. of tones: 64 (UKOOA / PFEER compliant)

No. of stages: 4

Volume control: Adjustable -12dB(A) [Tone 2]

Effective range: 125m/410ft @ 1KHz

Stage switching: DC units: negative or positive. AC units: common supply line

General: Common component features:

Ingress protection: IP rating per EN60529:IP66
Type rating per UL50E/NEMA250:4/4X/3R/13

Enclosure material: Marine grade aluminium LM6 – copper free
Chromated & powder coated – corrosion proof

Colour: Red, Grey

Lens material: Borosilicate glass dome & PC colour filter

Guard: Stainless Steel dome guard as standard

Stopping plugs: Brass/Nickel Plated/Stainless Steel plugs included

Ground/Earth: M5

Terminals: 0.5 – 2.5mm² (20-14 AWG)

Line monitoring: Blocking diode included. EOL can be factory fitted

Certified temp: -40 to +50°C [-40° to +122°F]

Storage temp: -40 to +70°C [-40° to +158°F]

Relative humidity: 95% – Additional tropicalisation is recommended for applications where both high relative humidity and high

Part Codes

Part Code: **Ident.:** **Description:**

Product type: D2xC3 Alarm Bar Xenon Strobe or LED Beacons with Alarm Horn Sounder

Junction box & back plate: N1 No junction box required
J1 With D2xJ1 junction box

Beacon Type (Add code for each Beacon required): 1Y D2xB1X05 5 Joule Xenon Strobe Beacon
2Y D2xB1X10 10 Joule Xenon Strobe Beacon
3Y D2xB1LD2 LED Beacon
4Y A: Amber B: Blue C: Clear G: Green
5Y M: Magenta R: Red Y: Yellow
Y=Colour: D2xB1LD2 with AC supply voltage only available in first beacon position with J1 Junction Box option
Note:

Alarm horn: S1 D2xS1 Alarm Horn Sounder

Voltage: AC115 115-120Vac 50/60Hz
AC230 220-230Vac 50/60Hz
DC024 24Vdc

Cable entries: [e] A 2 x M20x1.5
B 2 x 1/2" NPT
C 2 x 3/4" NPT – adaptors
D 2 x M25x1.5 – adaptors
E 1 x 1/2" NPT
F 1 x 3/4" NPT – adaptor
G 1 x M25x1.5 – adaptor

Stopping plug/Adaptor material: [m] B Brass
N Nickel Plated
S Stainless Steel

Guard/Tag material: [s] 1 316 St/St Guard & 316 Equipment Tag
3 316 St/St Guard & 316 Equip. Tag & Duty Labels
5 316 St/St Guard & 316 Equip. Tag & Duty Labels attached by steel wire

Product version: [v]A UL, cUL, ULC, IECEx & ATEX

Product option: [o] 1 Standard Wiring (Positive stage switching)
2 Independent Wiring (Positive stage switching)
3 Alt. Standard Wiring (Negative stage switching)
4 Independent Wiring (Negative stage switching)
5 Beacons & Sounder Linked w/ Line Monitoring
6 Independent Wiring w/ Line Monitoring
W Special Wiring
X Custom Configuration
Note: Options are product specific, please review wiring drawings


Enclosure colour: R Red
[x] G Grey

Example: D2xC3 J1 5G 5A 5R S1 DC024 B N 1 A 1 G
D2xC3 Stack with a D2xJ1 junction box and 3 x D2xB1LD2 LED beacons with green, amber and red lenses, D2xS1 alarm horn sounder, 2 x 1/2" NPT entries with nickel plated brass stopping plugs and a grey enclosure

NOTE: Assemblies with 115Vac or 230Vac supply voltage requiring a D2xB1LD2 LED beacon in the first position must also select the 'J1' junction box option.
Stacks of 4 or more beacons plus an alarm horn sounder are available as custom assemblies – contact E2S for further details.

Current Consumption

Voltage & Range:	Frequency:	D2xB1LD2 LED Beacon Component Nominal Current:	D2xB1X10 10J Xenon Beacon Component Nominal Current:	D2xB1X05 5J Xenon Beacon Component Nominal Current:	D2xS1 Alarm Horn Sounder Component Nominal Current:
24Vdc		99.5mA	560mA	275mA	313mA
115-120Vac	50/60Hz	68mA	185mA	80mA	90mA
220-230Vac	50/60Hz	70mA	107mA	30mA	52mA

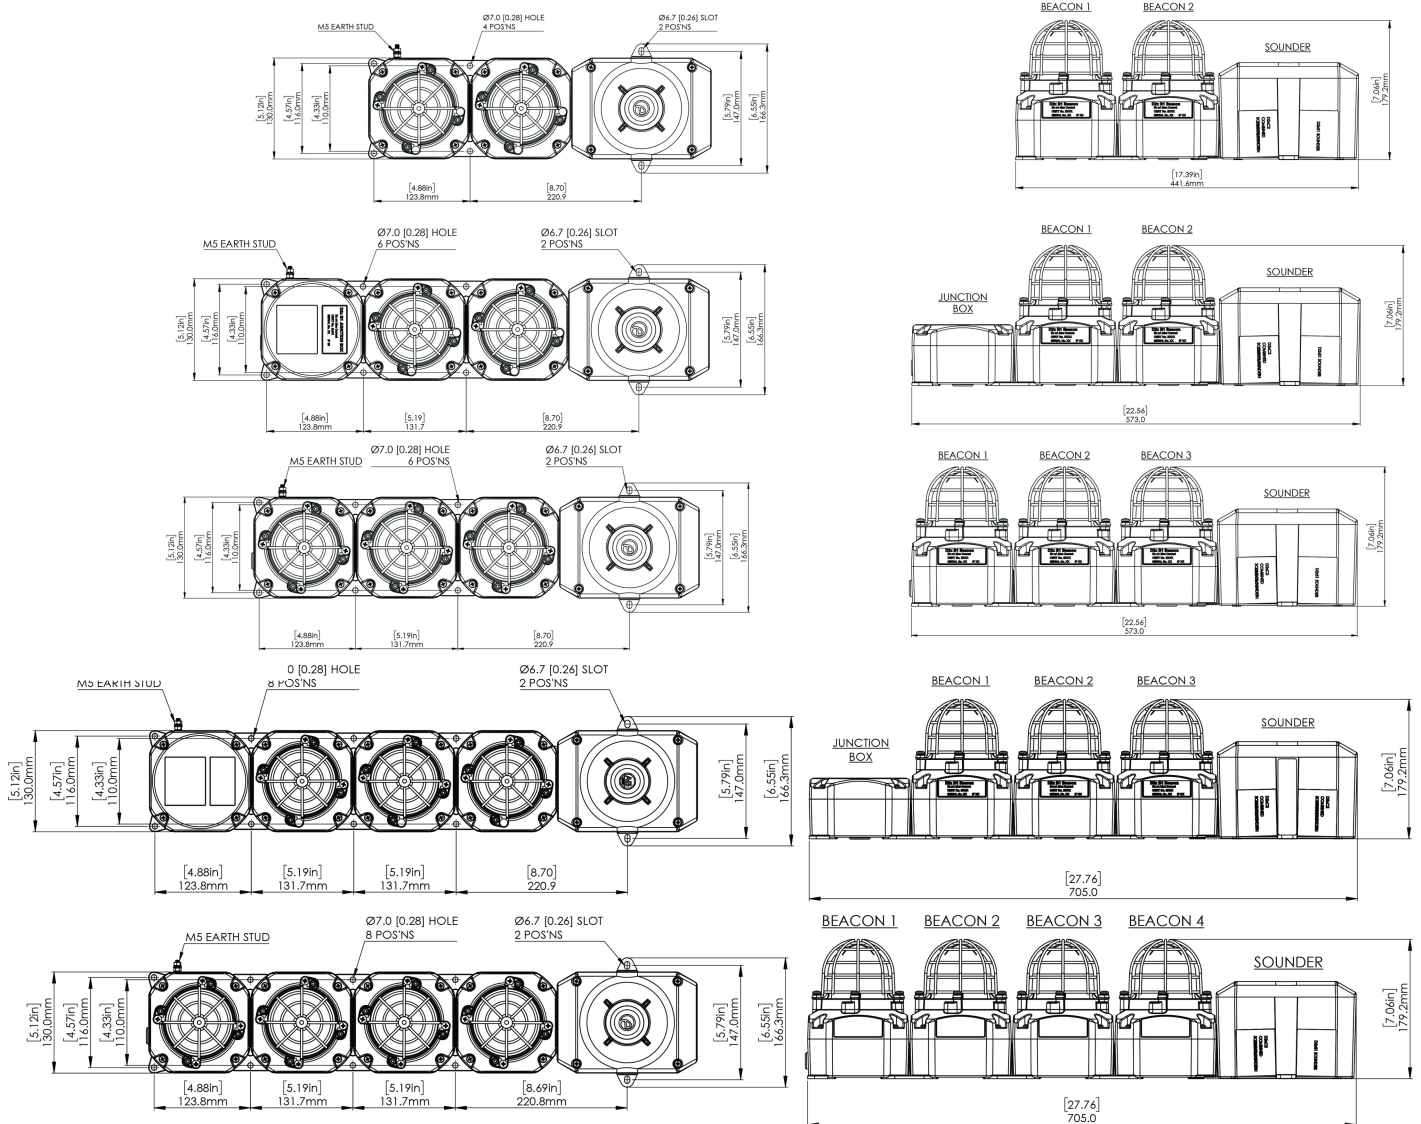

Tone table

S 1	Description	S 2	S 3	S 4	S 1	Description	S 2	S 3	S 4
T 1	1000 Continuous - PFEER Toxic Gas	T 3	T 2	T 44	T 33	800 (0.25s on, 1.00s off) Intermittent	T 53	T 24	T 8
T 2	1200/500 @ 1Hz Sweeping - DIN / PFEER P.T.A.P.	T 1	T 3	T 44	T 34	800 @ 2Hz (0.25s on, 0.25s off) - IMO code 3...	T 56	T 24	T 8
T 3	1000 @ 0.5Hz (1s on, 1s off) Intermittent - P...	T 1	T 2	T 44	T 35	1000 @ 1Hz (0.50s on, 0.50s off) Intermittent	T 44	T 24	T 8
T 4	1.4KH-1.6KHz 1s, 1.6KHz-1.4KHz 0.5s - NF C 48...	T 44	T 24	T 1	T 36	2400 @ 1Hz (0.50s on, 0.50s off) Intermittent	T 21	T 24	T 8
T 5	544(100mS)/440 (400mS) - NF S 32-001	T 52	T 19	T 1	T 37	2900 @ 5Hz (0.10s on, 0.10s off) Intermittent	T 53	T 24	T 8
T 6	1500/500 - (0.5s on , 0.5s off) x3 + 1s gap -...	T 7	T 44	T 1	T 38	363/518 @ 1Hz (0.50s / 0.50s) Alternating	T 1	T 8	T 19
T 7	500-1500Hz Sweeping 2 sec on 1 sec off - AS4428	T 6	T 44	T 1	T 39	450/500 @ 2Hz (0.25s / 0.25s) Alternating	T 1	T 8	T 19
T 8	500/1200Hz @ 0.26Hz(3.3s on, 0.5s off) - NEN ...	T 44	T 24	T 35	T 40	554/440 @ 1Hz (0.50s / 0.50s) Alternating	T 44	T 24	T 19
T 9	1000 (1s on, 1s off)x7 + (7s on, 1s off) - IM...	T 18	T 34	T 1	T 41	554/440 @ 0.65Hz (0.76s / 0.76s) Alternating	T 1	T 8	T 19
T 10	1000 (1s on, 1s off)x7 + (7s on, 1s off) - IM...	T 21	T 34	T 1	T 42	561/760 @ 0.83Hz (0.60s / 0.60s) Alternating	T 1	T 8	T 19
T 11	420(0.5s on, 0.5s off)x3 + 1s gap - ISO 8201 ...	T 44	T 1	T 8	T 43	780/600 @ 0.96Hz (0.52s / 0.52s) Alternating	T 1	T 8	T 19
T 12	1000(0.5s on, 0.5s off)x3 + 1s gap - ISO 8201...	T 44	T 1	T 8	T 44	800/1000 @ 2Hz (0.25s / 0.25s) Alternating	T 5	T 24	T 19
T 13	422/775 - (0.85 on, 0.5 off) x3 + 1s gap - ...	T 44	T 1	T 8	T 45	970/800 @ 2Hz (0.25s / 0.25s) Alternating	T 1	T 8	T 19
T 14	1000/2000 @ 1Hz - Singapore	T 23	T 3	T 35	T 46	800/1000 @ 0.875Hz (0.57s / 0.57s) Alternating	T 53	T 24	T 19
T 15	300 Continuous	T 44	T 24	T 35	T 47	2400/2900 @ 2Hz (0.25s / 0.25s) Alternating	T 57	T 24	T 19
T 16	440 Continuous	T 44	T 24	T 35	T 48	500/1200 @ 0.3Hz (1.67s / 1.67s) Sweeping	T 44	T 24	T 12
T 17	470 Continuous	T 44	T 24	T 35	T 49	560/1055 @ 0.18Hz (2.73s / 2.73s) Sweeping	T 44	T 24	T 12
T 18	500 Continuous - IMO code 2 (Low)	T 44	T 24	T 35	T 50	560/1055 @ 3.3Hz (0.15s / 0.15s) Sweeping	T 44	T 24	T 12
T 19	554 Continuous	T 64	T 24	T 35	T 51	600/1250 @ 0.125Hz (4s / 4s) Sweeping	T 44	T 24	T 12
T 20	660 Continuous	T 44	T 24	T 35	T 52	660/1200 @ 1Hz (0.50s / 0.50s) Sweeping	T 64	T 24	T 12
T 21	800 Continuous - IMO code 2 (High)	T 44	T 24	T 35	T 53	800/1000 @ 1Hz (0.50s / 0.50s) Sweeping	T 56	T 24	T 12
T 22	1200 Continuous	T 44	T 24	T 35	T 54	800/1000 @ 7Hz (0.07s / 0.07s) Sweeping	T 57	T 24	T 12
T 23	2000 Continuous	T 15	T 3	T 35	T 55	800/1000 @ 50Hz (0.01s / 0.01s) Sweeping	T 54	T 24	T 12
T 24	2400 Continuous	T 48	T 20	T 35	T 56	2400/2900 @ 7Hz (0.07s / 0.07s) Sweeping	T 57	T 24	T 12
T 25	440 @ 0.83Hz (0.60s on, 0.60s off) Intermittent	T 1	T 44	T 8	T 57	2400/2900 @ 1Hz (0.50s / 0.50s) Sweeping	T 47	T 24	T 12
T 26	470 @ 0.9Hz (0.55s on, 0.55s off) Intermittent	T 1	T 44	T 8	T 58	2400/2900 @ 50Hz (0.01s / 0.01s) Sweeping	T 54	T 24	T 12
T 27	470 @ 5Hz (0.10s on, 0.10s off) Intermittent	T 1	T 44	T 8	T 59	2500/3000 @ 2Hz (0.25s / 0.25s) Sweeping	T 44	T 24	T 12
T 28	544 @ 1.14Hz (0.43s on, 0.44s off) Intermittent	T 44	T 24	T 8	T 60	2500/3000 @ 7.7Hz (0.65s / 0.65s) Sweeping	T 44	T 24	T 12
T 29	655 @ 0.875Hz (0.57s on, 0.57s off) Intermittent	T 1	T 44	T 8	T 61	800Hz Motor Siren	T 44	T 24	T 12
T 30	660 @ 0.28Hz (1.80s on, 1.80s off) Intermittent	T 44	T 24	T 8	T 62	1200Hz Motor Siren	T 44	T 24	T 12
T 31	660 @ 3.3Hz (0.15s on, 0.15s off) Intermittent	T 30	T 24	T 8	T 63	2400Hz Motor Siren	T 44	T 24	T 12
T 32	745 @ 1Hz (0.50s on, 0.50s off) Intermittent	T 44	T 24	T 8	T 64	Simulated Bell	T 44	T 21	T 12