





1	2	3	4	5	6	7	8	9	10
							ISSUE	MOD No.	REASON - INITIAL - DATE
							A		INTRODUCTION RSR - 05/03/2021



OPTIONAL LINE MONITORING RESISTOR, CUSTOMER SUPPLIED,
RECOMMENDED MINIMUM VALUES:
14V MAX SYSTEM = 120Ω MIN, 2W MIN OR 1KΩ MIN, 0.5W MIN
28V MAX SYSTEM = 470Ω MIN, 2W MIN OR 2.4KΩ MIN, 0.5W MIN



LED Single Stage Configuration Xenon Strobe Single Stage	Config.: 1a	LED Two/Three Stage .Voltage Free 2nd & 3rd Stage Activation Configuration Xenon Strobe Single Stage	Config.: 1b
---	-------------	---	-------------

Line Monitoring Apply Power to +ve & -ve to power each beacon	Line Monitoring Stage 1: Apply Power to Stage 1 +ve & Stage 1 -ve/Common Stage 2: Apply Power to Stage 1 +ve & Stage 1 -ve/Common & connect Stage 2 to Stage 1 -ve/Common Stage 3: Apply Power to Stage 1 +ve & Stage 1 -ve/Common & connect Stage 3 to Stage 1 -ve/Common
--	---

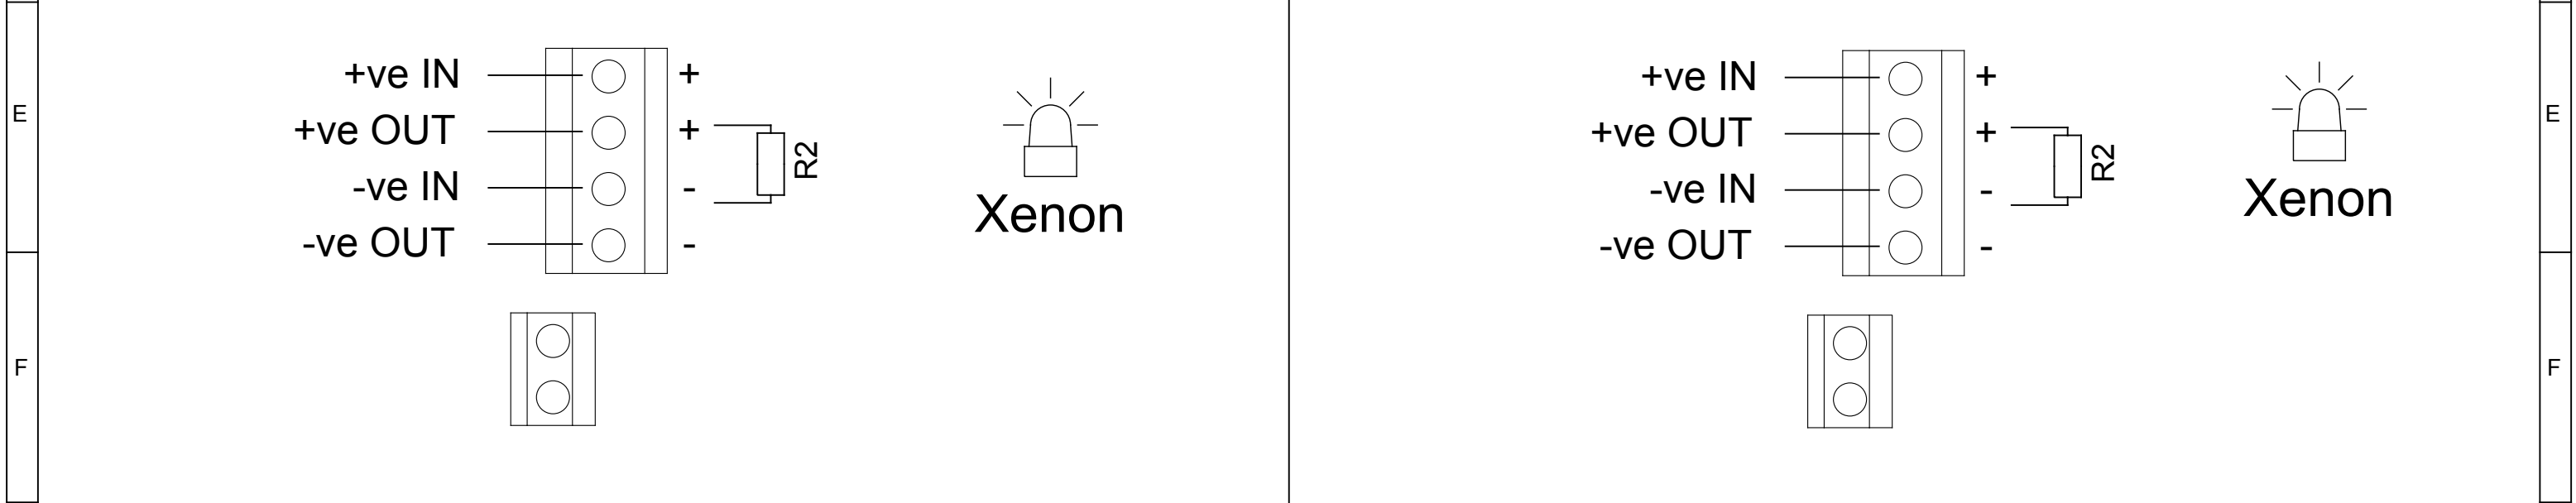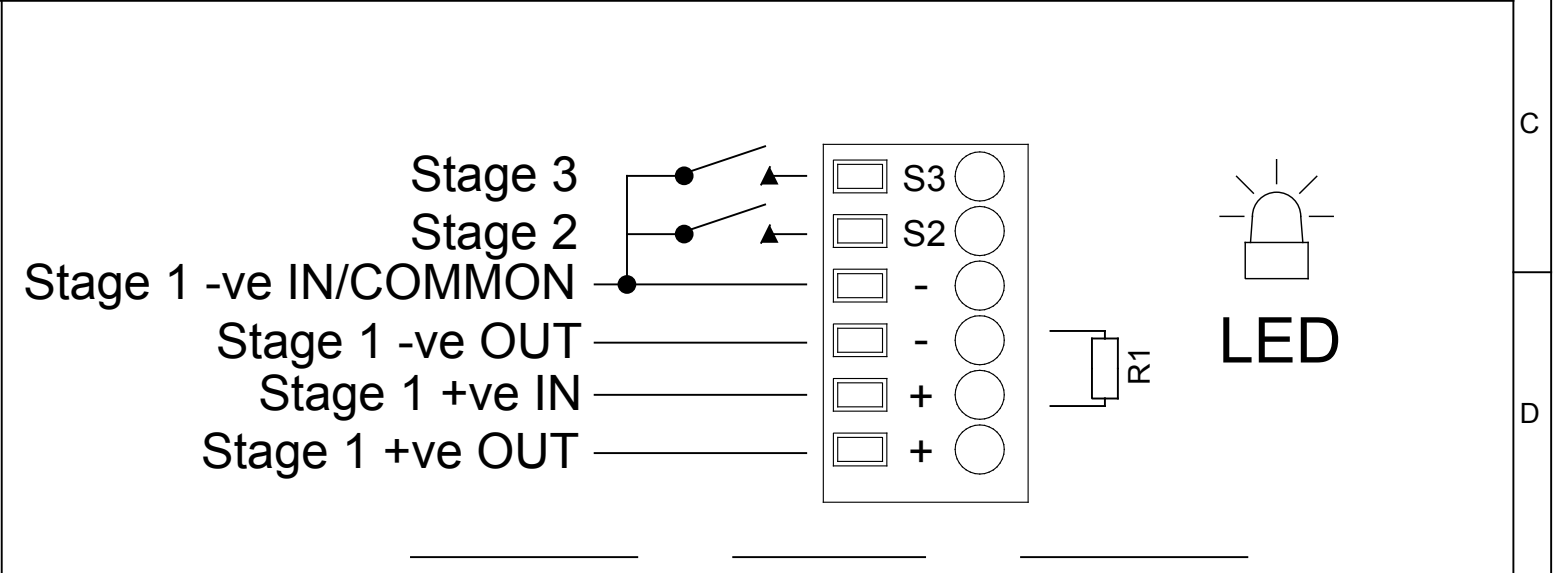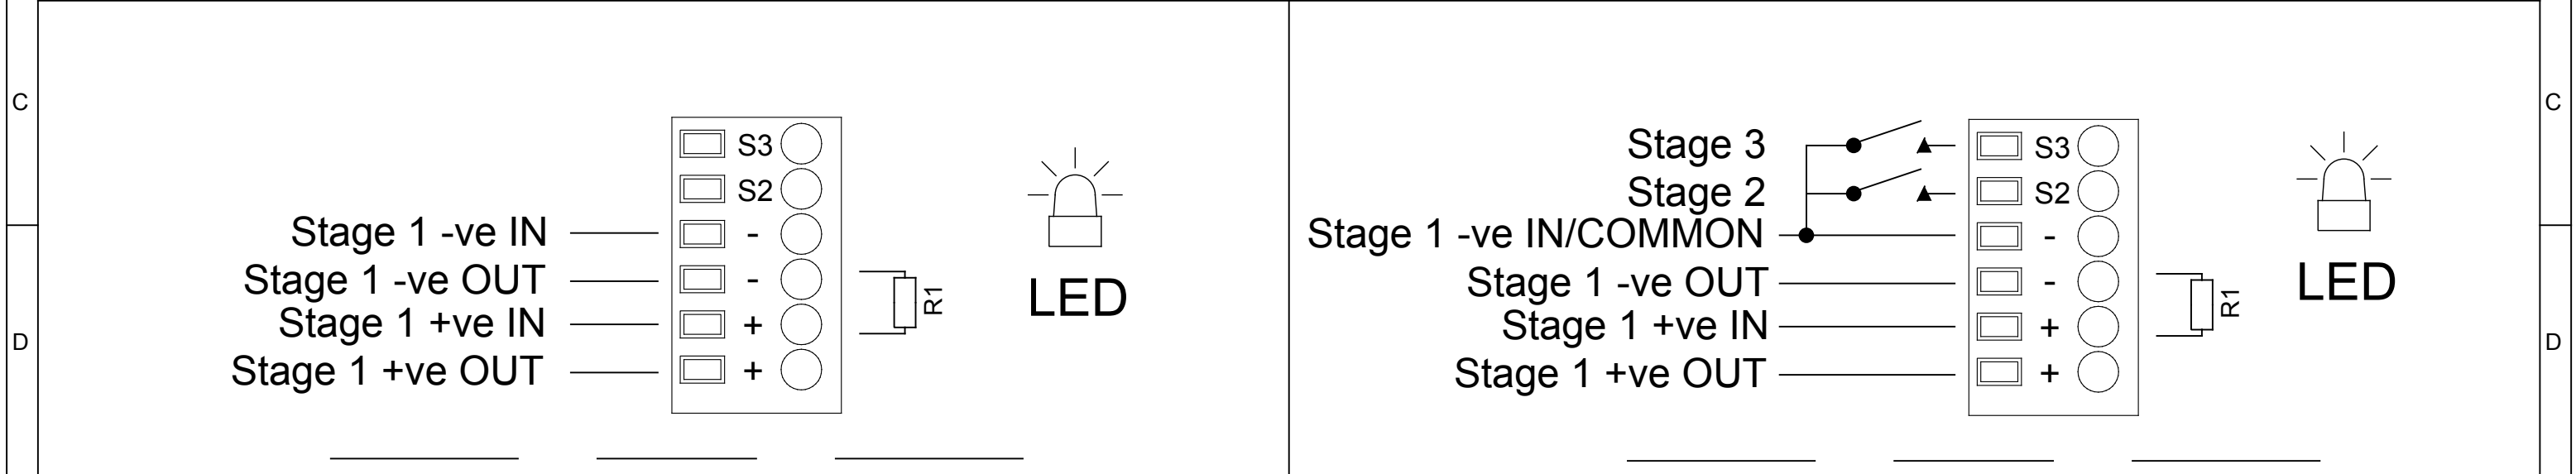

DRAWING TO BS8888:2000 GEOMETRIC TOLERANCES TO ISO1101:1983 LINEAR DIMENSIONAL TOLS ANGULAR DIMENSIONAL TOLS	DRAWN R.S.RAIT	DATE 05/03/2021	SURFACE FINISH	WEIGHT (Kg)	THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER THEREIN IS COMMUNICATED IN CONFIDENCE AND IS THE COPYRIGHT PROPERTY OF EUROPEAN SAFETY SYSTEMS LTD. NEITHER THE WHOLE OR ANY EXTRACT MAY BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING OR TENDERING PURPOSES WITHOUT THEIR WRITTEN CONSENT.	 EUROPEAN SAFETY SYSTEMS LTD IMPRESS HOUSE MANSELL ROAD ACTON LONDON W3 7QH WWW.E2S.COM	ALL DIMENSIONS IN MM IF IN DOUBT, ASK - DO NOT SCALE		A3
	CHECKED B.ISARD	DATE 05/03/2021	MATERIAL	TITLE MCBLD2X05 DC LED/XENON DUAL BEACON WIRING DIAGRAMS					
	STANDARDS M RANGE	APPROVED R.N.POTTS	DATE 05/03/2021	ALTERNATIVE MATERIAL			SCALE NTS	SHEET 1 OF 1	DRAWING NUMBER D207-06-651