

1

SPECTRA B100LDA

Permanent L.E.D. Array Beacon
 9 x High powered L.E.D's
 IP Rating: IP65
 Temp: -25°C to +50°C
 Unit weight: 93g
 CE, UKCA



Dimensions : Ø60 x 65.5mm
 Cable entry: Plugable 2.5mm² terminals

x = Lens colour
 R = Red A = Amber
 B = Blue G = Green
 Y = Yellow

Order code Voltage
 B100LDA030B/x 10-30V DC 80mA

B100LDA230B/x 230V AC 32mA

Mountings
 Panel mount Ø37mm (PG29)

D144-00-001-IS Issue 1



Sheet 1 of 1
 19/01/2023

Tel : +44 (0)20 8743 8880
 www.e2s.com



3

SPECTRA B100LDA

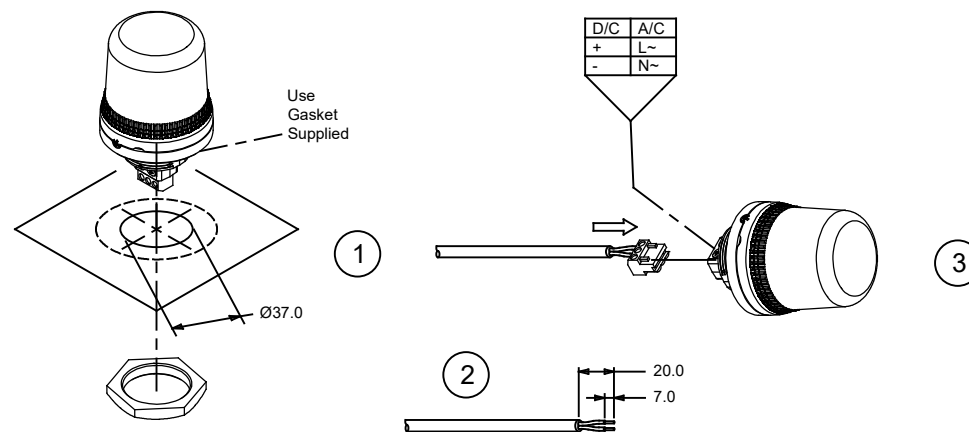

Dimensions in mm

2

ATTENTION: Installation must be carried out by an electrician in compliance with the latest codes and regulations.

ATTENTION: Disconnect from power source before installation or service to prevent electric shock.

ATTENTION: Lens on unit will be hot allow to cool prior to removal.