

1

SPECTRA

Trumpet Horn
IP Rating: IP65
Temp: -25°C to +50°C
Unit weight: 341g
CE, UKCA

Order code Voltage
H110T030G 10-30V AC/DC
• 12V dc 52mA
• 24V dc 105mA
• 12V ac 50/60Hz 115mA
• 24V ac 50Hz 215mA

H110T230G 40-260V AC/DC
• 48V dc 42mA
• 48V ac 50/60Hz 68mA
• 115V dc 16mA
• 230V dc 8mA
• 115V ac 50/60Hz 36mA
• 230V ac 50/60Hz 18mA




H110 T

Dimensions : 336.7 x 135mm
1.5mm² terminals
Cable entry: 1 x 5-7mm push
through grommet



3

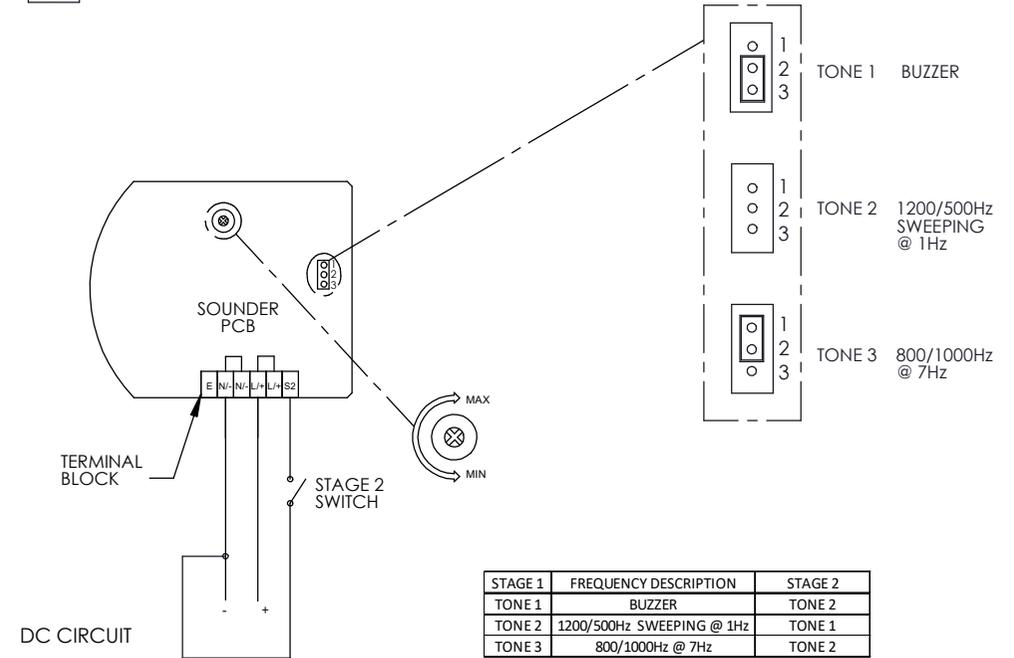


2


⚠ ATTENTION: Installation must be carried out by an electrician in compliance with the latest codes and regulations.

⚠ ATTENTION: Disconnect from power source before installation or service to prevent electric shock.

4

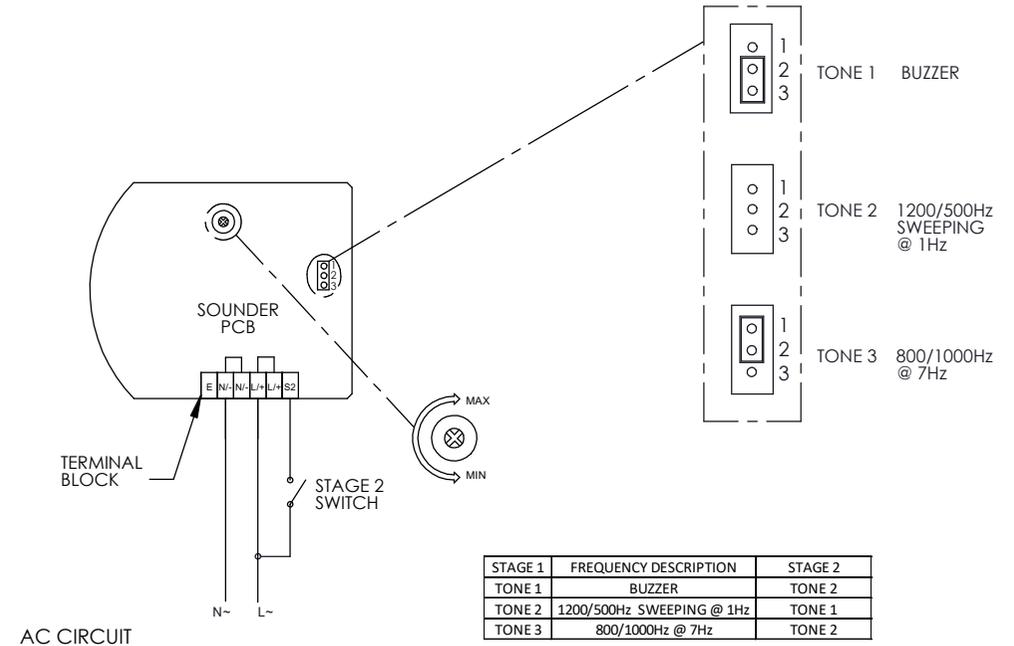

**5 SPECTRA
H 110 T**

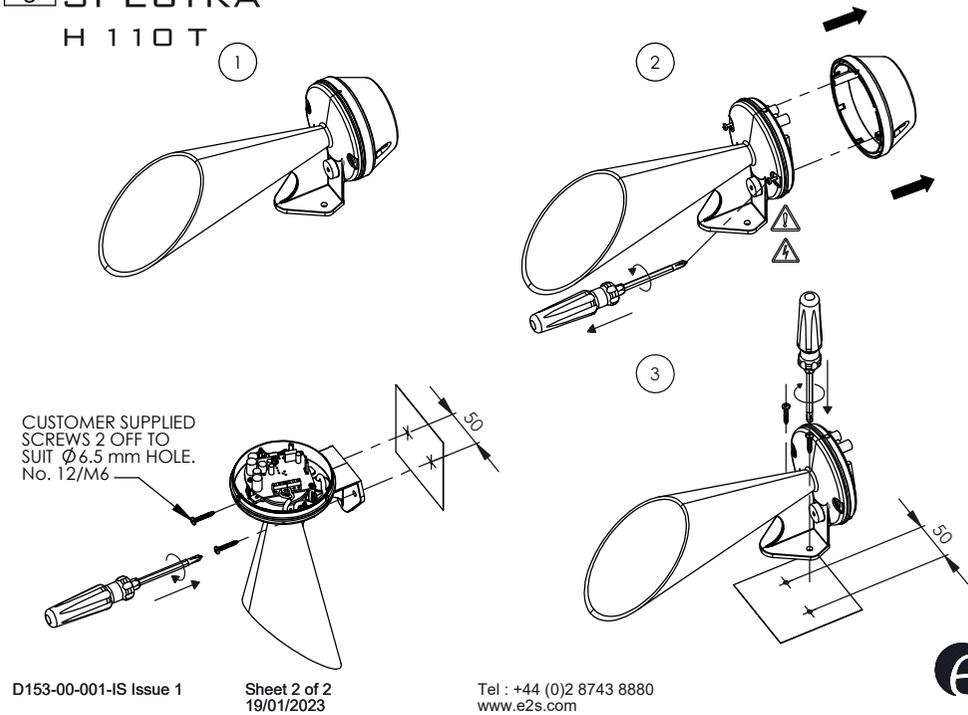

D153-00-001-IS Issue 1


Sheet 2 of 2
19/01/2023

Tel : +44 (0)2 8743 8880
www.e2s.com






7

TERMINAL BLOCK	A/C INPUT	D/C INPUT
E		
N/-	N~	-
N/-	N~(FROM BEACON)	-(FROM BEACON)
L/+	L~	+
L/+	L~(FROM BEACON)	+(FROM BEACON)
S2	SWITCH TO L~	SWITCH TO -

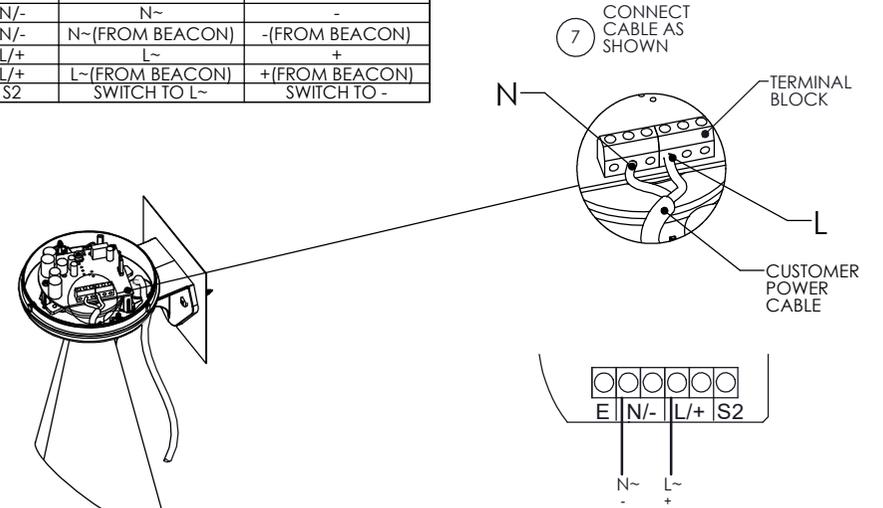

6

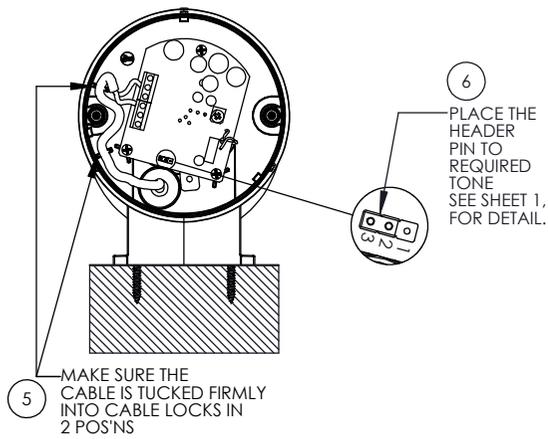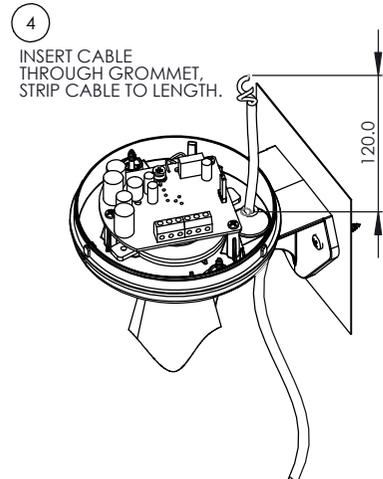

Dimensions in mm

8

