


1	2	3	4	5	6	7	8	9	10	
							ISSUE	MOD No.	INITIAL/DATE	
							1		Introduction MA 02-02-2024	
A										A
B										B
C										C
D										D
E										E
F										F

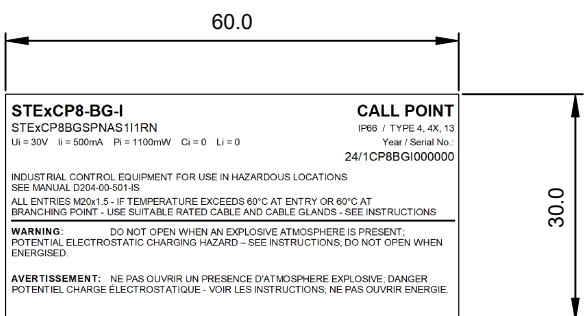

STExCP8-BG-I
 STExCP8BGSPNAS111RN
 Ui = 30V Ii = 500mA Pi = 1100mW Ci = 0 Li = 0
CALL POINT
 IP68 / TYPE 4, 4X, 13
 Year / Serial No.:
 24/1CP8BGI000000

INDUSTRIAL CONTROL EQUIPMENT FOR USE IN HAZARDOUS LOCATIONS
 SEE MANUAL D204-09-501-IS
 ALL ENTRIES M20x1.5 - IF TEMPERATURE EXCEEDS 60°C AT ENTRY OR 60°C AT BRANCHING POINT - USE SUITABLE RATED CABLE AND CABLE GLANDS - SEE INSTRUCTIONS

WARNING: DO NOT OPEN WHEN AN EXPLOSIVE ATMOSPHERE IS PRESENT. POTENTIAL ELECTROSTATIC CHARGING HAZARD - SEE INSTRUCTIONS, DO NOT OPEN WHEN ENERGISED.

AVERTISSEMENT: NE PAS OUVRIR UN PRESENCE D'ATMOSPHERE EXPLOSIVE, DANGER POTENTIEL CHARGE ELECTROSTATIQUE - VOIR LES INSTRUCTIONS, NE PAS OUVRIR ENERGIE.

**STExCP8-BG-I
 PRODUCT LABEL 1**

	0518		2813	DEMKO 15 ATEX 1588X IECEx ULD 15.0018X UL21UKEX2133X Made in the United Kingdom ATEX / IECEx / UKEx Ex ia IIC T8 Ga (Ta -55°C to +70°C) NEC/CEC CLASS / DIV: Class I Div 1 Group ABCD T8 Ta -55°C to +70°C NEC CLASS ZONE: Class I Zone 0 AEx ia IIC T8 Ga Ta -55°C to +70°C CEC CLASS ZONE: Ex ia IIC T8 Ga Ta -55°C to +70°C
			E513632	

Impress House, Mansell Road, London W3 7QH UK
 www.e2s.com

**STExCP8-BG-I
 PRODUCT LABEL 2**

STExCP8-BG-IR
 STExCP8BGSPNAS11RRN
 Ui = 30V Ii = 500mA Pi = 1100mW Ci = 0 Li = 0
CALL POINT
 IP68 / TYPE 4, 4X, 13
 Year / Serial No.:
 24/1CP8BGIR000000

INDUSTRIAL CONTROL EQUIPMENT FOR USE IN HAZARDOUS LOCATIONS
 SEE MANUAL D204-09-501-IS
 ALL ENTRIES M20x1.5 - IF TEMPERATURE EXCEEDS 60°C AT ENTRY OR 60°C AT BRANCHING POINT - USE SUITABLE RATED CABLE AND CABLE GLANDS - SEE INSTRUCTIONS

WARNING: DO NOT OPEN WHEN AN EXPLOSIVE ATMOSPHERE IS PRESENT. POTENTIAL ELECTROSTATIC CHARGING HAZARD - SEE INSTRUCTIONS, DO NOT OPEN WHEN ENERGISED.

AVERTISSEMENT: NE PAS OUVRIR UN PRESENCE D'ATMOSPHERE EXPLOSIVE, DANGER POTENTIEL CHARGE ELECTROSTATIQUE - VOIR LES INSTRUCTIONS, NE PAS OUVRIR ENERGIE.

**STExCP8-BG-IR
 PRODUCT LABEL 1**

	0518		2813	DEMKO 15 ATEX 1588X IECEx ULD 15.0018X UL21UKEX2133X Made in the United Kingdom ATEX / IECEx / UKEx Ex ia IIC T4 Ga (Ta -55°C to +70°C) NEC/CEC CLASS / DIV: Class I Div 1 Group ABCD T4 Ta -55°C to +70°C NEC CLASS ZONE: Class I Zone 0 AEx ia IIC T4 Ga Ta -55°C to +70°C CEC CLASS ZONE: Ex ia IIC T4 Ga Ta -55°C to +70°C
			E513632	

Impress House, Mansell Road, London W3 7QH UK
 www.e2s.com

**STExCP8-BG-IR
 PRODUCT LABEL 2**

DRAWING TO BS8888:2000 GEOMETRIC TOLERANCES TO ISO1101:1983 LINEAR DIMENSIONAL TOLS +/-0.35mm ANGULAR DIMENSIONAL TOLS +/-2 deg	DRAWN M.ABALOS	DATE 02-02-2024	SURFACE FINISH	WEIGHT (Kg)	THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER THEREIN IS COMMUNICATED IN CONFIDENCE AND IS THE COPYRIGHT PROPERTY OF EUROPEAN SAFETY SYSTEMS LTD. NEITHER THE WHOLE OR ANY EXTRACT MAY BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING OR TENDERING PURPOSES WITHOUT THEIR WRITTEN CONSENT. EUROPEAN SAFETY SYSTEMS LTD. AS PER LATEST DATE OF ISSUE SHOWN ABOVE	 EUROPEAN SAFETY SYSTEMS LTD IMPRESS HOUSE MANSELL ROAD ACTON LONDON W3 7QH WWW.E2S.COM	ALL DIMENSIONS IN MM IF IN DOUBT, ASK - DO NOT SCALE		A3
	CHECKED R.N.POTTS	DATE 02-02-2024	MATERIAL	TITLE STExCP8 BG INTRINSICALLY SAFE CALL POINT - PRODUCT LABEL					
	STANDARDS STExCP8 CALL POINTS	APPROVED R.N.POTTS	DATE 02-02-2024	ALTERNATIVE MATERIAL			SCALE 1:1	SHEET 1 of 1	DRAWING NUMBER D204-09-501