

# GNExCP6A-BG Break Glass Call Point

**Manual Call Point.** The GNExCP6A manual call points are available as break glass, push button or tool reset versions. They are approved for Zone 1, 2, 21 and 22 hazardous areas for the control of fire and gas alarm systems.

Available with either single or double pole change over switches. All versions are certified to ATEX and IECEx standards.


## Options

- Alternative housing colours are available to meet specific requirements.
- Single or double pole c/o switch.
- Metalised polyester or stainless steel "Duty" label.

## Approvals

- ATEX certificate: Sira 09ATEX3286X
- IECEx certificate: IECEx SIR 09.0121X
- SIL 2 certified to IEC 61508 (2010)
- Ex EAC certified: KZ.1510019.22.01.00271
- PESO CCOE certified: P471504



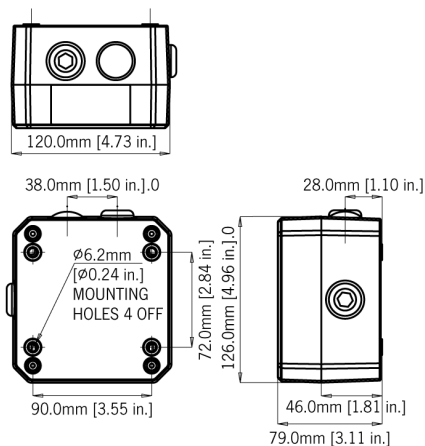

## Specification

GNECP6A:	II 2G Ex d e IIC T6 Gb II 2D Ex t IIIC T60°C Db IP66
Ambient:	Ta = -40°C to +55°C [-40°F to +131°F]
Ingress protection:	IP66
Housing material:	GRP – glass reinforced polyester (UV stable)
Colour:	RAL3000 Red (others available on request)
Cable entries:	2 x M20 clearance top and 1 x M20 clearance side. Back box can be rotated to give 2 x bottom and 1 x side entries.
Stopping plugs:	2 x Ex e nylon plugs as standard Brass and stainless steel plugs optional
Terminals:	6 × 4.0mm <sup>2</sup> cables.
Test:	Test key facility
Weight:	1.2Kg/2.64lbs
Note:	For applications requiring monitoring resistors, diodes or indicator LED's please see the GNECP6B-BG version. Data sheet reference: 1.3.07.

## Part Codes

Version:	Part code:	
Product type:	GNECP6A-BG	A type – no end of line devices
Switch Type: [s]	S D	SPCO DPCO
Stopping plug material: [m]	N B P S	Nylon Brass Nickel Plated Stainless Steel
Lift flap: [l]	L N	Lift flap No lift flap
Duty label [d]:	N P S	No duty label Metalised Polyester Stainless Steel
Enclosure colour: [x]	RD BL GN YW RW YB BK	Red Blue Green Yellow Red/White Yellow/Black Black
Accessories:	SP65-0001-A2 SP65-0001-A4 SP65-0002-A2 SP65-0002-A4	Pole Mount Bracket Kit 2" St/St A2 (304) Pole Mount Bracket Kit 2" St/St A4 (316) Sunshade – St/St A2 (304) Sunshade – St/St A4 (316)

## Versions

Version:	Voltage:	Switch rating:	Terminals:	Cable entries:
GNECP6A	250V ac Max. 50V dc Max.	5.0A Max. 1.0A Max.	6 × 4mm <sup>2</sup>	2 x M20 Top/Bottom 1 x M20 Left/Right
Coding:	II 2G Ex d e IIC T6 Gb Ta = -40°C to +55°C II 2D Ex t IIIC T60°C Db IP66			