


Features

- Bayonet fixing lens.
- Anti-tamper locking screw.
- Stainless steel fixings.
- Unit is supplied with a clear prismatic lens to optimise visibility in applications with high ambient light levels.

Approvals

- GOST-R certificate: POCC GB.JB05.H00144.



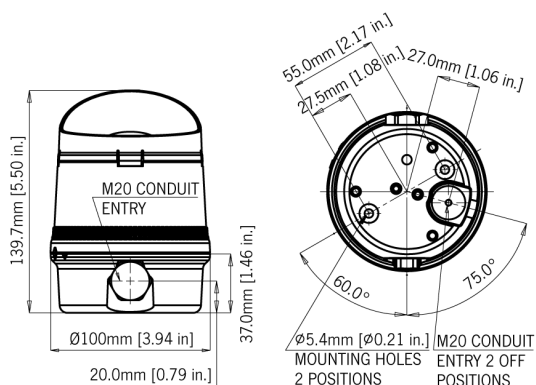

Specification

Light source:	High output L.E.D.
Light output:	15 x L.E.D. array
Function:	Permanent
L.E.D. colours:	Amber, Blue, Green, Red, White
Peak/Effective Intensity cd:	54 cd* - measured ref. to I.E.S.
Lens type:	Prismatic
Mounting:	Surface mount (Wall mount bracket available)
Entries:	1 x 5-7mm push through grommet 1 x M20 cable entry
Dimensions:	ø100 x 140mm
Ingress protection:	IP65
Housing material:	High impact UL94 V0 (f1) PC
Terminals:	0.5 to 1.5mm ²
Operating temp:	-25 to +50°C [-13° to +122°F]
Storage temp:	-40 to +70°C [-40° to +158°F]
Relative humidity:	90% at 20°C [68°F]
Weight:	350g/0.77lbs

Part Codes

Version:	Part code:
10-30V dc	B350TLA030B/[x]
90-230V ac	B350TLA230B/[x]
50/60Hz	

[x] = Lens colour: A: Amber
B: Blue
G: Green
R: Red
W: White

Note: B350TLA units are supplied with 'clear' lenses to maximise the light output in environments with high ambient light levels.

Mounting brackets:	Description:
MB-B350T-S	Mounting bracket kit for a single B350 type unit.
MB-B350T-M	Mounting bracket kit for linked multiple B350 type units

Note: Multiple unit connector is supplied with each product.

Current Consumption

Version:	Current mA:
Version:	Current mA:
10-30V dc	110mA
90-230V ac	50/60Hz 10-30mA