


### Features

- Bayonet fixing lens.
- Anti-tamper locking screw.
- Stainless steel fixings.
- User selectable flash frequencies.

### Approvals

- GOST-R certificate: POCC GB.JB05.H00144.



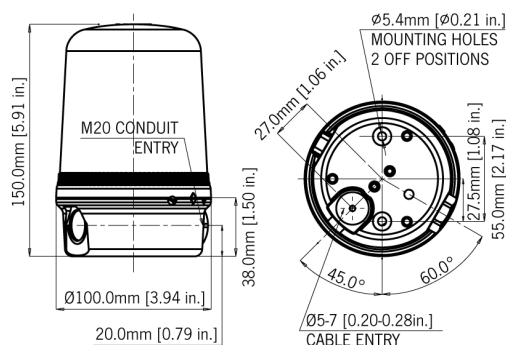

## Specification

Light source:	Filament lamp E14
Light output:	25W
Flash frequency:	User selectable during installation: 0.5Hz, 1Hz, 2Hz
Candela:	15 cd* (peak/effective intensity)
Lens colours:	Amber, Blue, Clear, Green, Red & Yellow
Lens type:	Prismatic (standard) or plain
Mounting:	Surface mount (right angle or pole mount accessories available)
Entries:	1 × 5-7mm push through grommet 1 x M20 cable entry
Dimensions:	Ø100 x 150mm
Ingress protection:	IP65
Housing material:	High impact UL94 V0 (f1) PC
Lens material:	High impact UL94 V0 (f1) PC
Terminals:	1.5 mm² flying lead assembly
Operating temp:	-25 to +50°C [-13° to +122°F]
Storage temp:	-40 to +70°C [-40° to +158°F]
Relative humidity:	90% at 20°C [68°F]
Weight:	370g/0.81lbs

\*Candela measurements representative of performance with clear lens at optimum voltage

## Part Codes

Version:	Wattage	Part code:
12V dc	25W	B300FLF012B/[x]
24V dc	25W	B300FLF024B/[x]
48V dc	25W	B300FLF048B/[x]
115V ac	25W	B300FLF115B/[x]
230V ac	25W	B300FLF230B/[x]
[x] = Lens colour:	A	Amber
	B	Blue
	C	Clear
	G	Green
	R	Red
	Y	Yellow

## Current Consumption

Version:	Current mA:
12V dc	1.75A
24V dc	1.1A
48V dc	0.8A
115V ac 50/60Hz	255mA
230V ac 50/60Hz	130mA