


Features

- Bayonet fixing lens.
- Anti-tamper locking screw.
- Stainless steel fixings.
- User selectable flash frequencies

Approvals

- GOST-R certificate: POCC GB.JB05.H00144.



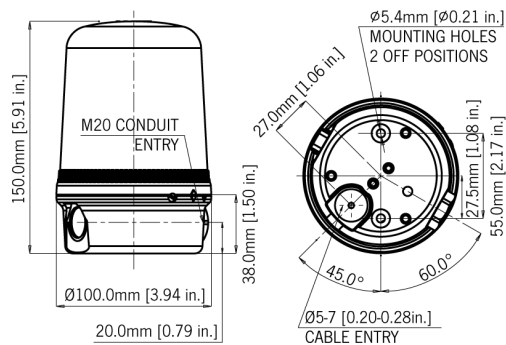

Specification

Light source:	Halogen Lamp G6,35/GY6,35
Light output:	20/25W
Flash frequency:	User selectable during installation: 0.5Hz, 1Hz, 2Hz
Candela:	21 cd* (peak/effective intensity)
Lens colours:	Amber, Blue, Clear, Green, Red & Yellow
Lens type:	Prismatic (standard) or plain
Mounting:	Surface mount (right angle or pole mount accessories available)
Entries:	1 × 5-7mm push through grommet 1 x M20 cable entry
Dimensions:	Ø100 x 150mm
Ingress protection:	IP65
Housing material:	High impact UL94 V0 (f1) PC
Lens material:	High impact UL94 V0 (f1) PC
Terminals:	1.5 mm² flying lead assembly
Operating temp:	-25 to +50°C [-13° to +122°F]
Storage temp:	-40 to +70°C [-40° to +158°F]
Relative humidity:	90% at 20°C [68°F]
Weight:	370g/0.81lbs

*Candela measurements representative of performance with clear lens at optimum voltage.

Part Codes

Version:	Wattage	Part code:
12V dc	20W	B300FLH012B/[x]
24V dc	20W	B300FLH024B/[x]
115V ac	25W	B300FLH115B/[x]
230V ac	25W	B300FLH230B/[x]
[x] = Lens colour:	A	Amber
	B	Blue
	C	Clear
	G	Green
	R	Red
	Y	Yellow

Current Consumption

Version:	Current mA:
12V dc	1.7A
24V dc	1.0A
115V ac 50/60Hz	208mA
230V ac 50/60Hz	116mA