


Features

- Bayonet fixing lens.
- Anti-tamper locking screw.
- Stainless steel fixings.

Approvals

- GOST-R certificate: POCC GB.JB05.H00144.



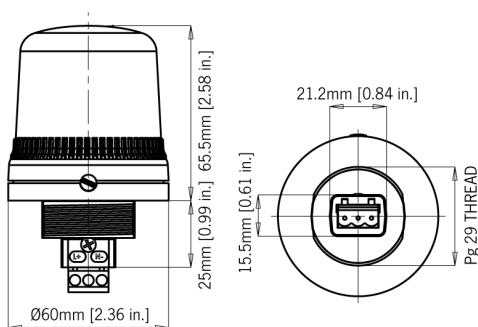

Specification

Light source:	Filament lamp BA9s
Light output:	5W
Function:	Permanent
Lens colours:	Amber, Blue, Clear, Green, Red & Yellow
Lens type:	Prismatic (standard) or plain
Candela:	5 cd* (peak/effective intensity)
Mounting:	Panel mount PG29
Ingress protection:	IP65
Housing material:	High impact UL94 V0 (f1) PC
Terminals:	0.5 to 1.5mm ² pluggable
Operating temp:	-25 to +50°C [-13° to +122°F]
Storage temp:	-40 to +70°C [-40° to +158°F]
Relative humidity:	90% at 20°C [68°F]
Weight:	93g/2.04lbs

*Candela measurements representative of performance with clear lens at optimum voltage.

Part Codes

Version:	Wattage:	Part code:
12-250V	5W	B100SLF 250B/[x]
[x] = Lens colour:		A Amber
		B Blue
		C Clear
		G Green
		R Red
		Y Yellow

NOTE: Filament lamps not included.