

# D2xC1X05 Alarm Horn Sounder & Xenon Strobe 5J

The D2xC1X05 features a high output, 116dB(A) alarm horn sounder combined with a 5 Joule Xenon strobe warning light / beacon. Globally approved, the robust Type 4/4X, IP66 enclosure ensures suitability for all haz loc fire alarm and general signalling applications.

The corrosion proof, marine grade aluminium die cast enclosure is chromated and powder coated providing resilience in the harshest of hazardous location environments. One device, globally certified: ATEX, IECEx Zone 2 & 22; NEC/CEC CI D2 and CII D2; NEC CI Zone 2 and Zone 22; CEC Zone 2 & 22 and CII D2. UL & cUL approved 24Vdc version for fire alarm use.

## Features

- 5 Joule Xenon beacon with 116dB(A) alarm horn
- UL464/UL1638 Fire Alarm
- Effective Intensity: 94.78 cd
- Peak Candela: 33,410 cd
- 64 alarm tones, 4 remotely selectable alarm stages/channels
- Automatic synchronisation on multi-sounder system
- Field replaceable lens colour filters

## Approvals

- UL File ref: E230764
- IECEx cert: IECEx ULD 14.0004X
- ATEX cert: DEMKO 14 ATEX 4786493904X
- CSFM listing: 7136-2279:0503
- Ex EAC certified: EAC RU C-GB.AA71.B.00273/20

## Coding

- NEC / CEC:
  - Class I Div 2 ABCD T2B Ta -40°C to +70°C
  - Class I Div 2 ABCD T2C Ta -40°C to +55°C
  - Class I Div 2 ABCD T2D Ta -40°C to +40°C
  - Class II Div 2 FG T5 Ta -40°C to +50°C
  - Class III Div 1&2 Ta -40°C to +50°C
- NEC:
  - Class I Zone 2 AEx nA IIC T2 Gc (Ta -40°C to +50°C)
  - Zone 22 AEx tc IIIC 120°C Dc (Ta -40°C to +50°C)
- CEC:
  - Class I Zone 2 Ex nA IIC T2B Gc X (Ta -40°C to +50°C)
  - Class I Zone 2 Ex nA IIC T2C Gc X (Ta -40°C to +45°C)
  - Zone 22 Ex tc IIIC 120°C Dc (Ta -40°C to +50°C)
  - Class II Div 2 EFG T4A Ta -40°C to +50°C
- IECEx & ATEX:
  - II 3G Ex nA IIC T2 Gc (Ta -40°C to +50°C)
  - II 3D Ex tc IIIC 90°C Dc (Ta -40°C to +50°C)



## Specification

### Alarm Horn

#### Sounder:

Maximum output: 116dB(A) @ 1 metre [107dB(A) @ 10ft/3m]

Nominal output: 112dB(A) @ 1m +/- 3dB - Tone 2 [103dB(A) @ 10ft/3m]

No. of tones: 64 (UK00A / PFEER compliant)

No. of stages: 4

Volume control: Adjustable -12dB(A) [Tone 2]

Effective range: 125m/410ft @ 1KHz

Stage switching: DC units - Positive or Negative line.  
AC units - common supply line

### Xenon Strobe

#### Beacon:

Energy: 5 Joules (5Ws)

Flash rate: 1Hz (60 fpm)

Peak Candela: 500,000 cd - calculated from energy (J)

Effective Intensity: 250 cd - calculated from energy (J)  
cd:

Peak Candela: 33,410 cd - measured ref. to I.E.S.

Effective Intensity: 94.78 cd - measured ref. to I.E.S.

Lens colours: Amber, Blue, Clear, Green, Magenta, Red & Yellow

Tube life: Emissions are reduced to 70% after 8 million flashes

#### General:

Voltages DC: 24V dc [20-28Vdc]; 48V dc [38-58Vdc]

Voltages AC: 115V ac 50/60Hz; 230V ac 50/60Hz

Ingress protection: EN60529: IP66  
UL50E / NEMA250: 4 / 4X / 3R / 13

Housing material: Marine grade aluminium Al Si12 Cu

Colour: Red (RAL3000), grey (RAL7038)

Cable entries: 2 x M20 x 1.5mm threaded gland entries

Terminals: 0.5 - 2.5mm<sup>2</sup> (20-14 AWG)

Grounding stud: M5

Operating temp: -40 to +70°C [-40° to +158°F] - Class I Div 2  
-40 to +50°C [-40° to +122°F] - All other approvals

Relative humidity: 95%

Weight: DC: 2.80kg/6.16lbs AC:3.10kg/6.82lbs

## Part Codes

### Variable:

### Identifier: Description:

Product type: D2xC1X05 Haz Loc alarm horn sounder & Xenon strobe warning light / beacon

Voltage: DC024 24V dc - UL/cUL Fire Alarm  
DC048 48V dc  
AC115 115V ac  
AC230 230V ac

Cable Entry Type: A 2 x M20x1.5mm  
[e] B 2 x 1/2" NPT - adaptors  
C 2 x 3/4" NPT - adaptors  
D 2 x M25x1.5mm - adaptors  
E 1 x 1/2" NPT - adaptor  
F 1 x 3/4" NPT - adaptor  
G 1 x M25x1.5mm - adaptor

Adaptor/Stopping B Brass  
plug material: [m] N Nickel Plated  
S Stainless Steel

Lens guard 1 A2 304 Stainless Steel  
material & tag 2 A4 316 Stainless Steel  
option: [s] 3 A2 304 St/St with Equip. Tag  
4 A4 316 St/St with Equip. Tag

Product version: [v]A1 UL, cUL, IECEx & ATEX

Enclosure colour: R Red RAL3000  
[x] G Grey RAL7038


Lens colour: [y] A Amber  
B Blue  
C Clear  
G Green  
M Magenta  
R Red  
Y Yellow

#### Accessories:

SP65-0001-A2 Pole Mount Bracket Kit 2" St/St A2 (304)  
SP65-0001-A4 Pole Mount Bracket Kit 2" St/St A4 (316)  
SP65-0002-A2 Sunshade - St/St A2 (304)  
SP65-0002-A4 Sunshade - St/St A4 (316)

## Current Consumption

Product Version:	Nominal Voltage:	Voltage Range:	Current Consumption:
<b>Alarm Horn Sounder:</b>			
DC024	24V dc	10-30V dc	313mA [at nominal voltage]
DC048	48V dc	38-58V dc	181mA [at nominal voltage]
AC115	115V ac 50/60Hz	+/-10%	89mA
AC230	230V ac 50/60Hz	+/-10%	52mA
<b>Xenon Strobe Beacon:</b>			
DC024	24V dc	20-28V dc	275mA [at nominal voltage]
DC048	48V dc	42-54V dc	145mA [at nominal voltage]
AC115	115V ac 50/60Hz	+/-10%	80mA
AC230	230V ac 50/60Hz	+/-10%	30mA
<b>Combined Horn &amp; Strobe:</b>			
DC024	24V dc	20-28V dc	513mA [at nominal voltage]
DC048	48V dc	42-54V dc	311mA [at nominal voltage]
AC115	115V ac 50/60Hz	+/-10%	174mA
AC230	230V ac 50/60Hz	+/-10%	63mA

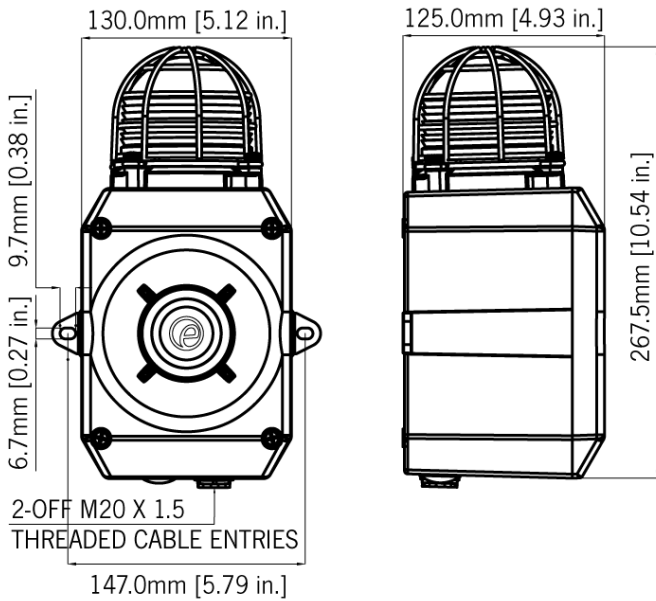

## Tone table

S 1	Description	S 2	S 3	S 4
T 1	1000 Continuous - PFEER Toxic Gas	T 3	T 2	T 44
T 2	1200/500 @ 1Hz Sweeping - DIN / PFEER P.T.A.P.	T 1	T 3	T 44
T 3	1000 @ 0.5Hz (1s on, 1s off) Intermittent - P...	T 1	T 2	T 44
T 4	1.4KH-1.6KHz 1s, 1.6KHz-1.4KHz 0.5s - NF C 48...	T 44	T 24	T 1
T 5	544(100mS)/440 (400mS) - NF S 32-001	T 52	T 19	T 1
T 6	1500/500 - (0.5s on , 0.5s off) x3 + 1s gap -...	T 7	T 44	T 1
T 7	500-1500Hz Sweeping 2 sec on 1 sec off - AS4428	T 6	T 44	T 1
T 8	500/1200Hz @ 0.26Hz(3.3s on, 0.5s off) - NEN ...	T 44	T 24	T 35
T 9	1000 (1s on, 1s off)x7 + (7s on, 1s off) - IM...	T 18	T 34	T 1
T 10	1000 (1s on, 1s off)x7 + (7s on, 1s off) - IM...	T 21	T 34	T 1
T 11	420(0.5s on, 0.5s off)x3 + 1s gap - ISO 8201 ...	T 44	T 1	T 8
T 12	1000(0.5s on, 0.5s off)x3 + 1s gap - ISO 8201...	T 44	T 1	T 8
T 13	422/775 - (0.85 on, 0.5 off) x3 + 1s gap - ...	T 44	T 1	T 8
T 14	1000/2000 @ 1Hz - Singapore	T 23	T 3	T 35
T 15	300 Continuous	T 44	T 24	T 35
T 16	440 Continuous	T 44	T 24	T 35
T 17	470 Continuous	T 44	T 24	T 35
T 18	500 Continuous - IMO code 2 (Low)	T 44	T 24	T 35
T 19	554 Continuous	T 64	T 24	T 35
T 20	660 Continuous	T 44	T 24	T 35
T 21	800 Continuous - IMO code 2 (High)	T 44	T 24	T 35
T 22	1200 Continuous	T 44	T 24	T 35
T 23	2000 Continuous	T 15	T 3	T 35
T 24	2400 Continuous	T 48	T 20	T 35
T 25	440 @ 0.83Hz (0.60s on, 0.60s off) Intermittent	T 1	T 44	T 8
T 26	470 @ 0.9Hz (0.55s on, 0.55s off) Intermittent	T 1	T 44	T 8
T 27	470 @ 5Hz (0.10s on, 0.10s off) Intermittent	T 1	T 44	T 8
T 28	544 @ 1.14Hz (0.43s on, 0.44s off) Intermittent	T 44	T 24	T 8
T 29	655 @ 0.875Hz (0.57s on, 0.57s off) Intermittent	T 1	T 44	T 8
T 30	660 @ 0.28Hz (1.80s on, 1.80s off) Intermittent	T 44	T 24	T 8
T 31	660 @ 3.3Hz (0.15s on, 0.15s off) Intermittent	T 30	T 24	T 8
T 32	745 @ 1Hz (0.50s on, 0.50s off) Intermittent	T 44	T 24	T 8

S 1	Description	S 2	S 3	S 4
T 33	800 (0.25s on, 1.00s off) Intermittent	T 53	T 24	T 8
T 34	800 @ 2Hz (0.25s on, 0.25s off) - IMO code 3...	T 56	T 24	T 8
T 35	1000 @ 1Hz (0.50s on, 0.50s off) Intermittent	T 44	T 24	T 8
T 36	2400 @ 1Hz (0.50s on, 0.50s off) Intermittent	T 21	T 24	T 8
T 37	2900 @ 5Hz (0.10s on, 0.10s off) Intermittent	T 53	T 24	T 8
T 38	363/518 @ 1Hz (0.50s / 0.50s) Alternating	T 1	T 8	T 19
T 39	450/500 @ 2Hz (0.25s / 0.25s) Alternating	T 1	T 8	T 19
T 40	554/440 @ 1Hz (0.50s / 0.50s) Alternating	T 44	T 24	T 19
T 41	554/440 @ 0.65Hz (0.76s / 0.76s) Alternating	T 1	T 8	T 19
T 42	561/760 @ 0.83Hz (0.60s / 0.60s) Alternating	T 1	T 8	T 19
T 43	780/600 @ 0.96Hz (0.52s / 0.52s) Alternating	T 1	T 8	T 19
T 44	800/1000 @ 2Hz (0.25s / 0.25s) Alternating	T 5	T 24	T 19
T 45	970/800 @ 2Hz (0.25s / 0.25s) Alternating	T 1	T 8	T 19
T 46	800/1000 @ 0.875Hz (0.57s / 0.57s) Alternating	T 53	T 24	T 19
T 47	2400/2900 @ 2Hz (0.25s / 0.25s) Alternating	T 57	T 24	T 19
T 48	500/1200 @ 0.3Hz (1.67s / 1.67s) Sweeping	T 44	T 24	T 12
T 49	560/1055 @ 0.18Hz (2.73s / 2.73s) Sweeping	T 44	T 24	T 12
T 50	560/1055 @ 3.3Hz (0.15s / 0.15s) Sweeping	T 44	T 24	T 12
T 51	600/1250 @ 0.125Hz (4s / 4s) Sweeping	T 44	T 24	T 12
T 52	660/1200 @ 1Hz (0.50s / 0.50s) Sweeping	T 64	T 24	T 12
T 53	800/1000 @ 1Hz (0.50s / 0.50s) Sweeping	T 56	T 24	T 12
T 54	800/1000 @ 7Hz (0.07s / 0.07s) Sweeping	T 57	T 24	T 12
T 55	800/1000 @ 50Hz (0.01s / 0.01s) Sweeping	T 54	T 24	T 12
T 56	2400/2900 @ 7Hz (0.07s / 0.07s) Sweeping	T 57	T 24	T 12
T 57	2400/2900 @ 1Hz (0.50s / 0.50s) Sweeping	T 47	T 24	T 12
T 58	2400/2900 @ 50Hz (0.01s / 0.01s) Sweeping	T 54	T 24	T 12
T 59	2500/3000 @ 2Hz (0.25s / 0.25s) Sweeping	T 44	T 24	T 12
T 60	2500/3000 @ 7.7Hz (0.65s / 0.65s) Sweeping	T 44	T 24	T 12
T 61	800Hz Motor Siren	T 44	T 24	T 12
T 62	1200Hz Motor Siren	T 44	T 24	T 12
T 63	2400Hz Motor Siren	T 44	T 24	T 12
T 64	Simulated Bell	T 44	T 21	T 12