

# GNEExCP7-BG-I IS Break Glass Manual Call Point

The GNEExCP7-BG-I break glass **intrinsically safe** manual call points feature a **robust GRP enclosure with a 316 stainless steel mechanism and IP66/67 rating – manufactured for the harshest of hazardous environments.**

Globally approved to IECEx, ATEX, UL and cUL standards for all Class I Div 1 and Zone 0 installations. Available with DIN rail terminals or the innovative E2S termination board with dedicated connections for EOL and/or series devices. SIL2 compliant to IEC 61508 (2010). DNV type approved for exposed locations.

## Features


- Corrosion proof GRP enclosure, anti-static & UV stable
- Ingress protection IP66/67/68, 4/4X/3R/13
- Single or double switch (SPCO/DPCO)
- 316 (A4) stainless steel mechanism
- Optional stainless steel lift flap
- 3 x cable entries, 2 x stopping plugs included
- Optional LED indicator

## Approvals

- UL/cUL cert: UL-USL513632-352311-42200202-2
- IECEx cert: IECEx ULD 19.0007X
- ATEX cert: DEMKO 19 ATEX 2101X
- UKCA cert: UL21UKEX2134X
- DNV cert: TAA000034V
- SIL 2 compliant to IEC 61508 (2010)

## Coding

- NEC Class / Zone  
Class I Zone 0 AEx ia IIC T6 Ga Ta -55°C to +70°C
  - CEC Class / Zone  
Ex ia IIC T6 Ga Ta -55°C to +70°C
  - NEC / CEC Class / Div  
Class I Div 1 Group ABCD T6 Ta -55°C to +70°C
  - IECEx / ATEX  
II 1G Ex ia IIC T6 Ga Ta -55°C to +70°C
- Note: All rated to T4 with EOL, series and/or LED.

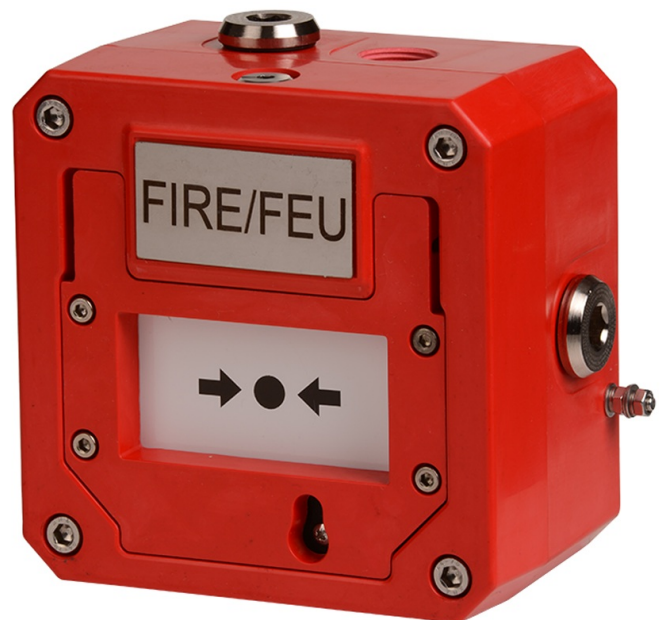

### Specification

GNExCP7-BG-I			IS Break Glass Manual Call Point
Temp. Range:	-55°C to +60°C/+70°C		
Switch:	Sealed – IP67		
Ingress protection:	IP66/67/68 to EN/IEC 60529 4/4X/3R/13 to UL50E/NEMA250		
Enclosure matl:	GRP Glass Reinforced Polyester, anti-static & UV stable		
Colour:	Red Other solid and striped colours available		
Lift flap:	Optional 316 stainless steel lift flap		
Cable entries:	2 x M20x1.5 down facing and 1 x M20x1.5 side Can be rotated to provide 2 x top facing and 1 x side entries Cable entries adaptable to 1/2"NPT, 3/4"NPT & M25		
Stopping plugs:	2 x Stopping plugs as standard Brass, Nickel plated or Stainless Steel		
Terminals:	DIN rail 8 × 2.5mm² SAK2.5 or Termination board featuring 6 × 2.5mm² terminals plus 4 x dedicated EOL & Series terminals		
Earth:	External M5 earth connection		
Relative Humidity:	R.H. 95% @ 20°C		
MTBF:	479.6 years / 4,201,680 hours I- MIL 217		
Weight:	2.1Kg/4.63lbs		
Supply voltage:	24Vdc Nominal 30Vdc Maximum via barriers		
Input safety parameters:	Ui	30V	
	Ii	500mA	
	Pi	1100mW	
	Ci	0	
	Li	0	
Component:	Value:	Max current:	
End-of-Line Resistor	min. 470R / 2W or min. 2k2 / 0.5W	n/a – limited by barrier	
	5% Max. tolerance. Min. size: Ø3.5 × 9.0mm 2W or Ø2.6 × 6.8mm 0.5W		
End-of-Line Diode	2W	59.13mA – limited by system	
	Type 1N5401. Min. size: Ø4.8 × 7.2mm		
Series Resistor	min. 470R / 2W or min. 2k2 / 0.5W	n/a – limited by barrier	
	5% Max. tolerance. Min. size: Ø3.5 × 9.0mm 2W or Ø2.6 × 6.8mm 0.5W		
Series Diode	2W	59.13mA – limited by system	
	Type 1N5401. Min. size: Ø4.8 × 7.2mm		
Series Zener Diode	3V3	230mA – limited by system	
	4V7	162mA – limited by system	
Type 1N53xB Ø3.3 × 8.4mm	5V1	149mA – limited by system	
	5V6	136mA – limited by system	
Min component size	6V2	122mA – limited by system	
	6V8	112mA – limited by system	
	10V	76mA – limited by system	
	12V	63mA – limited by system	
Spares:			
SP70-0001	Replacement break glass elements (Pack of 50)		
SP70-0040	STxCP8-BG Test Key		
Accessories:			
SP65-0001-A4	Pole Mount Bracket Kit St/St A4 (316)		
SP65-0002-A4	Sunshade – St/St A4 (316)		
SP70-0065	Break glass hammer with chain		

### Part Codes

Version:	Part reference:	Description:
Product type:	GNExCP7BG IS Break Glass Manual Call Point	
Switch type: [s]	S	SPCO/SPDT
	D	DPCO/DPDT
Terminals: [t]	D	DIN Rail 8 × SAK2.5
	P	PCBA termination: 6 × 2.5mm <sup>2</sup> plus 4 × EOL & Series terminals NOTE: D option only available if no EOL, series or LED are required P option only available if EOL, series or LED are required to be factor fitted or installed during installation
Lift flap: [l]	N	No lift flap
	L	Stainless steel lift flap
Cable entries:[e]	A	3 x M20x1.5mm
	B	2 × 1/2" NPT – adaptors
	C	2 × 3/4" NPT – adaptors
	D	2 x M25x1.5mm – adaptors
	E	1 × 1/2" NPT – adaptor
	F	1 × 3/4" NPT – adaptor
	G	1 x M25x1.5mm – adaptor
Stopping plug/ adaptor material: [m]	B	Brass
	P	Nickel Plated Brass
	S	Stainless Steel
Duty label/Equipment tag: [d]:	1	No Duty label, no Equip. tag
	2	Duty label Stainless Steel
	3	Duty label St/St + Equip. tag
	4	Duty label Metalised Polyester
	5	Duty label M. Poly. + Equip. tag
	6	Equip. tag only
	7	Special label requirement
Product version: [v]	I	UL, cUL, IECEx, ATEX, DNV
Product option: [o]	1	Standard product
	R	With EOL, series and/or LED devices
	W	Alternate EOL wiring
Enclosure colour: [x]	R	Red
	B	Blue
	N	Green
	Y	Yellow
	V	Red/White
	S	Yellow/Black
	K	Black
	M	Magenta
	Z	Red/Black
LED indicator: [u]	N	No LED required
	L	LED with 1.5K ballast resistor
	C	LED without ballast resistor
E.O.L.Module: [e] optional	ExxxR	Resistor value in Ohms e.g. E470R = 470 Ohm
	ED1	Diode IN4007 = ED1
	ExxxZ	Zener diode e.g. E5V1Z = 5.1V
Series Module: [s] optional	SxxxR	Resistor value in Ohms e.g. S1K5R = 1.5K Ohm
	SD1	Diode IN4007 = SD1
	SxxxZ	Zener diode e.g. S5V1Z = 5.1V

