


1	2	3	4	5	6	7	8	9	10
							ISSUE	MOD No.	REASON - INITIAL - DATE
							A		INTRODUCTION RSR - 05/03/2021

OPTIONAL LINE MONITORING RESISTOR, CUSTOMER SUPPLIED,
RECOMMENDED MINIMUM VALUES:
14V MAX SYSTEM = 120Ω MIN, 2W MIN OR 1KΩ MIN, 0.5W MIN
28V MAX SYSTEM = 470Ω MIN, 2W MIN OR 2.4KΩ MIN, 0.5W MIN

SWITCHES FOR STAGE OPERATION
CUSTOMER SUPPLIED

Single Stage Configuration Power: +ve & -ve	Config.: 1	Two/Three Stage .Voltage Free 2nd & 3rd Stage Activation Configuration	Config.: 2
Stage 1: Apply Power to Stage 1 +ve & Stage 1 -ve/Common Stage 2: Apply Power to Stage 1 +ve & Stage 1 -ve/Common & connect Stage 2 to Stage 1 -ve/Common Stage 3: Apply Power to Stage 1 +ve & Stage 1 -ve/Common & connect Stage 3 to Stage 1 -ve/Common			

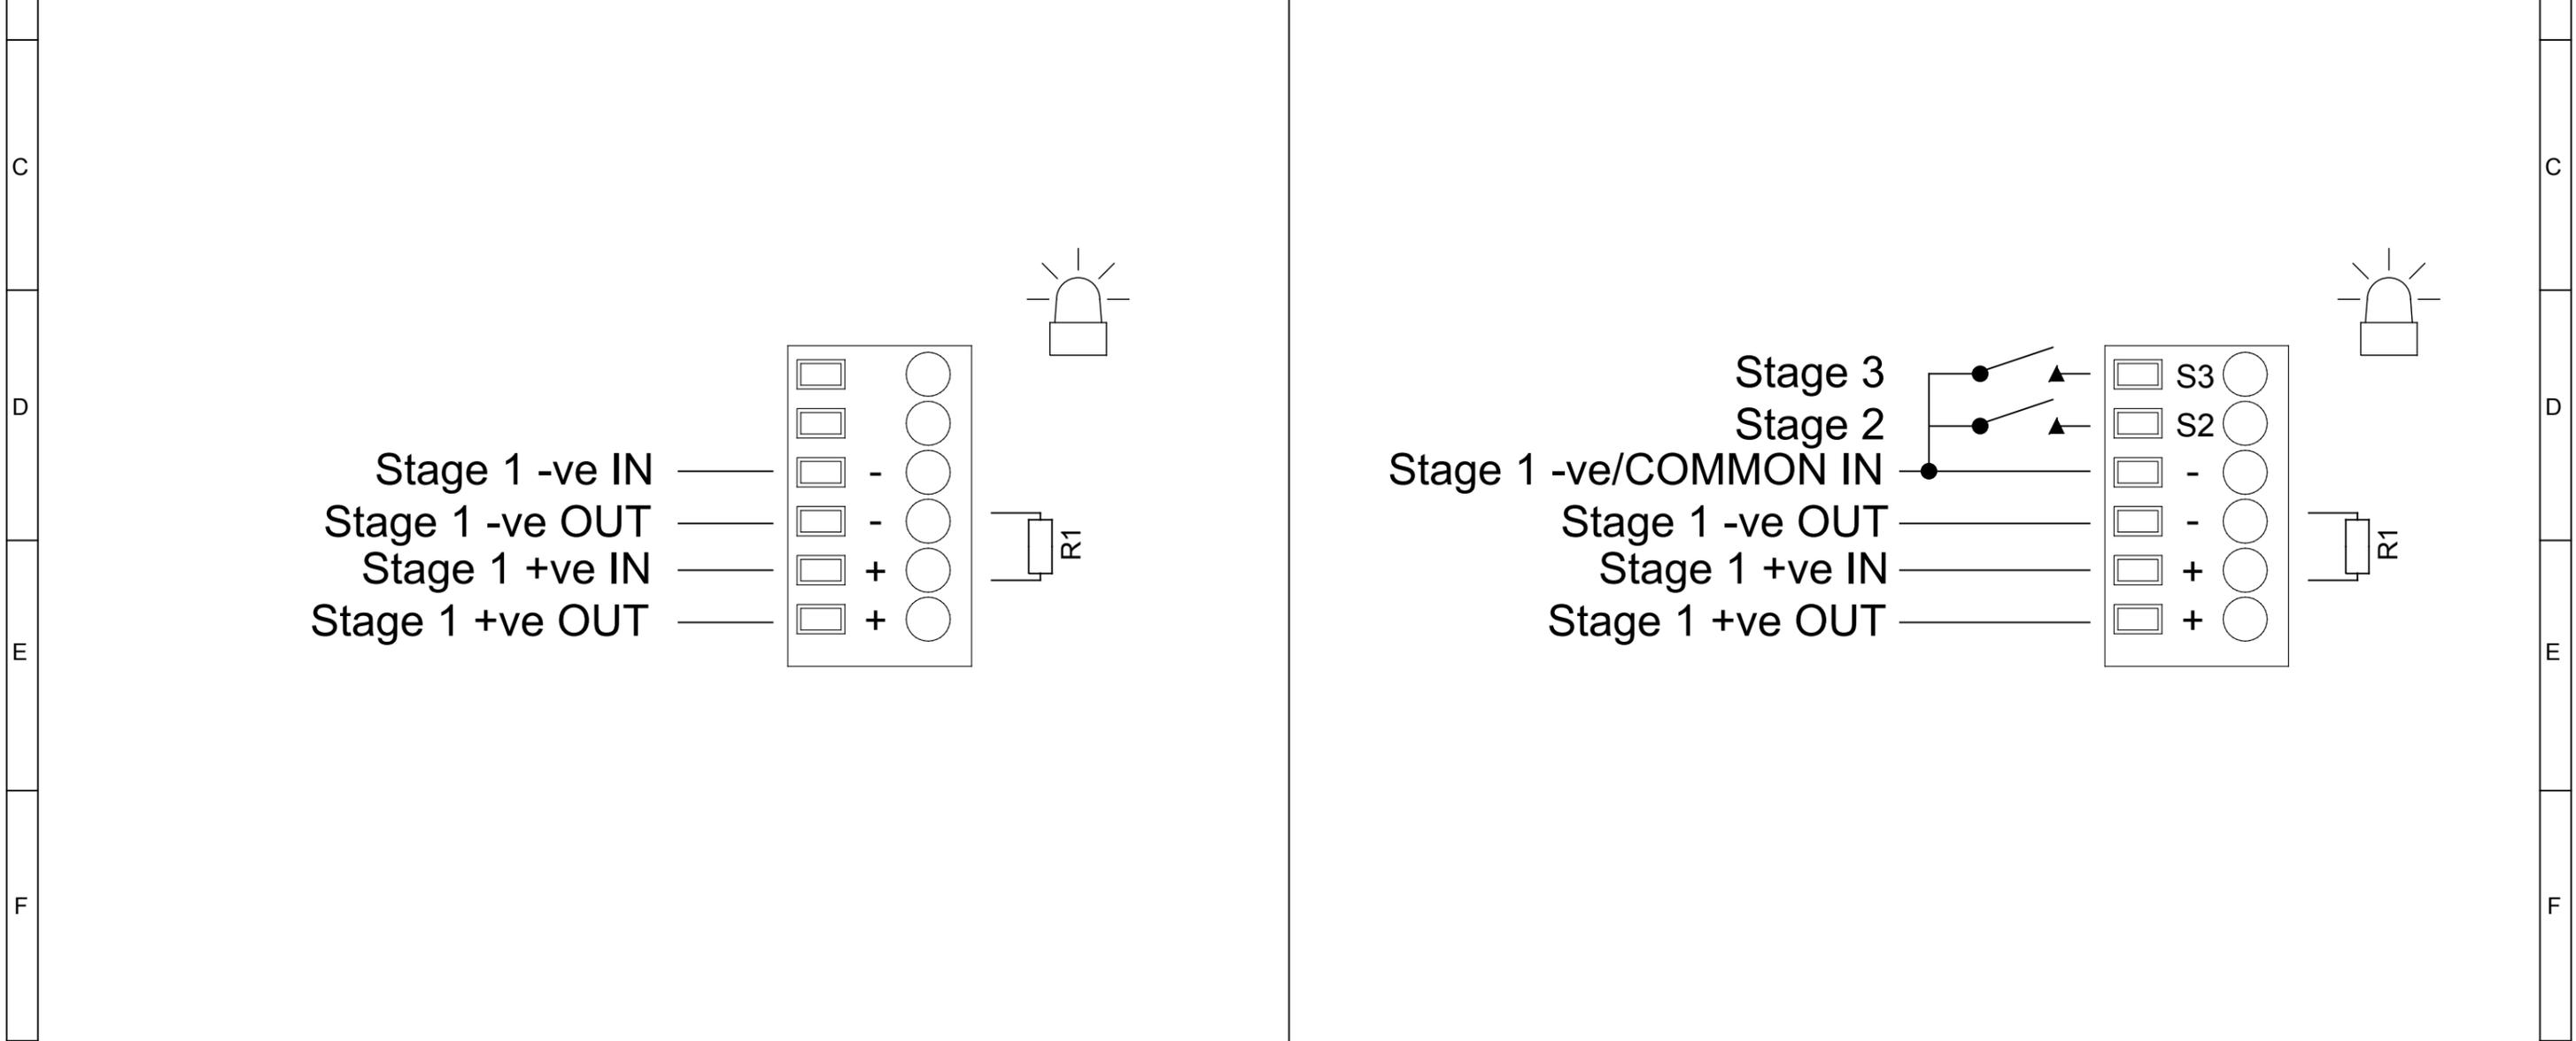

DRAWING TO BS8888:2000 GEOMETRIC TOLERANCES TO ISO1101:1983 LINEAR DIMENSIONAL TOLS ANGULAR DIMENSIONAL TOLS	DRAWN	DATE	SURFACE FINISH	WEIGHT (Kg)	THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER THEREIN IS COMMUNICATED IN CONFIDENCE AND IS THE COPYRIGHT PROPERTY OF EUROPEAN SAFETY SYSTEMS LTD. NEITHER THE WHOLE OR ANY EXTRACT MAY BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING OR TENDERING PURPOSES WITHOUT THEIR WRITTEN CONSENT.	 EUROPEAN SAFETY SYSTEMS LTD IMPRESS HOUSE MANSELL ROAD ACTON LONDON W3 7QH WWW.E2S.COM	ALL DIMENSIONS IN MM			A3
	R.S.RAIT	05/03/2021					IF IN DOUBT, ASK - DO NOT SCALE			
	STANDARDS	CHECKED	DATE	MATERIAL			TITLE DC MBLD2 LED BEACON & MCBLD2LD2 DUAL LED BEACON WIRING DIAGRAMS			
M RANGE	R.N.POTTS	05/03/2021	ALTERNATIVE MATERIAL		SCALE	SHEET	DRAWING NUMBER			
	R.N.POTTS	05/03/2021			NTS	1 OF 1	D207-06-401			