


OPTIONAL LINE MONITORING RESISTOR, CUSTOMER SUPPLIED,
 REQUIRED MINIMUM VALUES:
 24VDC : 1KΩ MIN, 2W MIN OR 3K9Ω MIN, 0.5W MIN

ISSUE	MOD No.	REASON - INITIAL - DATE
1		INTRODUCTION DH 17-05-2022

DC LED D2XB1LD3 UNITS
 Line Monitoring
 Power +ve and -ve

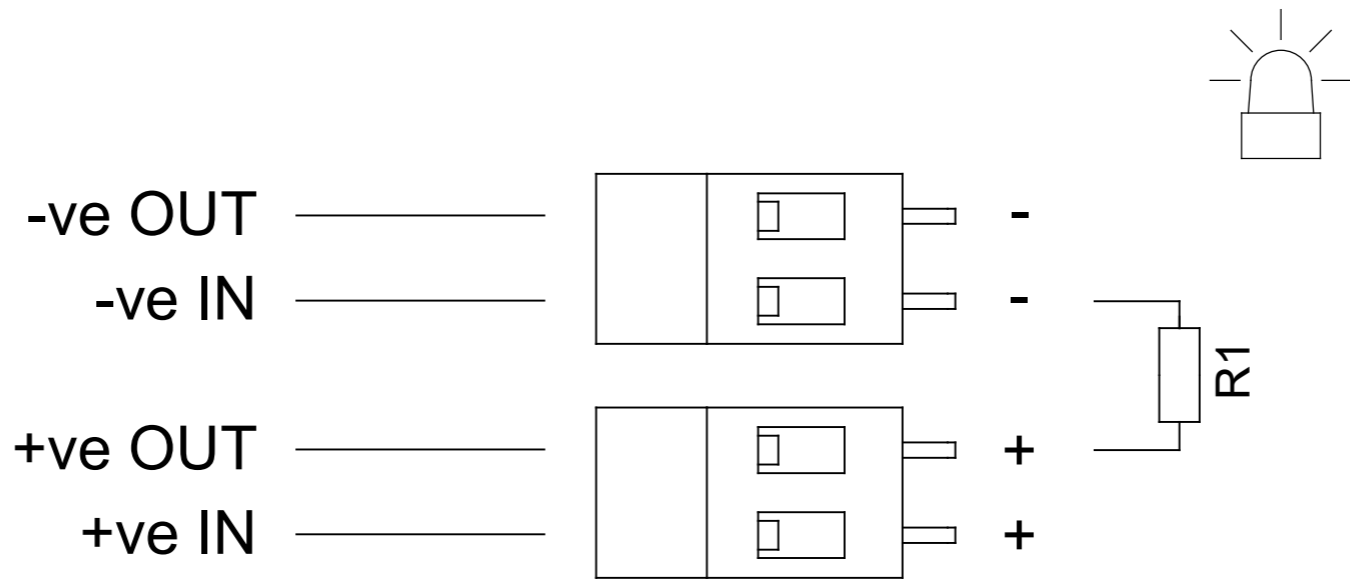

DRAWING TO BS8888:2000
 GEOMETRIC TOLERANCES TO ISO1101:1983
 LINEAR DIMENSIONAL TOLS +/-0.35mm
 ANGULAR DIMENSIONAL TOLS +/-2 deg
 STANDARDS
 D2x

DRAWN	DATE
R.S. RAIT	17-05-2022
CHECKED	DATE
B. ISARD	17-05-2022
APPROVED	DATE
R.N.POTTS	17-05-2022

SURFACE FINISH	WEIGHT (Kg)
MATERIAL	
ALTERNATIVE MATERIAL	

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE
 MATTER THEREIN IS COMMUNICATED IN CONFIDENCE AND IS
 THE COPYRIGHT PROPERTY OF EUROPEAN SAFETY SYSTEMS
 LTD. NEITHER THE WHOLE OR ANY EXTRACT MAY BE
 DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING
 OR TENDERING PURPOSES WITHOUT THEIR WRITTEN
 CONSENT.
 © EUROPEAN SAFETY SYSTEMS LTD.
 AS PER LATEST DATE OF ISSUE SHOWN ABOVE

e2s
 warning signals
 EUROPEAN SAFETY SYSTEMS LTD
 IMPRESS HOUSE
 MANSELL ROAD
 ACTON
 LONDON W3 7QH
 WWW.E2S.COM

ALL DIMENSIONS IN MM IF IN DOUBT, ASK - DO NOT SCALE			A3
TITLE D2xB1LD3 BEACONS WIRING DIAGRAM			
SCALE NTS	SHEET 1 OF 2	DRAWING NUMBER D211-06-471	