



ISSUE	MOD No.	REASON - INITIAL - DATE
1		INTRODUCTION RSR - 13/09/2022

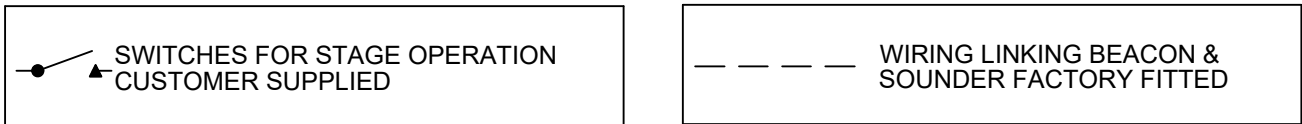

Standard Configuration, Factory Wired (Beacon & Sounder to be operate Simultaneously) Config.: 1a

Apply power to +ve & -ve terminals
 Apply dial tone to Telephone input terminals
 For Stage 2: Power +ve & -ve terminals or telephone input terminals and connect -ve to Stage 2
 For Stage 3: Power +ve & -ve terminals or telephone input terminals and connect -ve to Stage 3

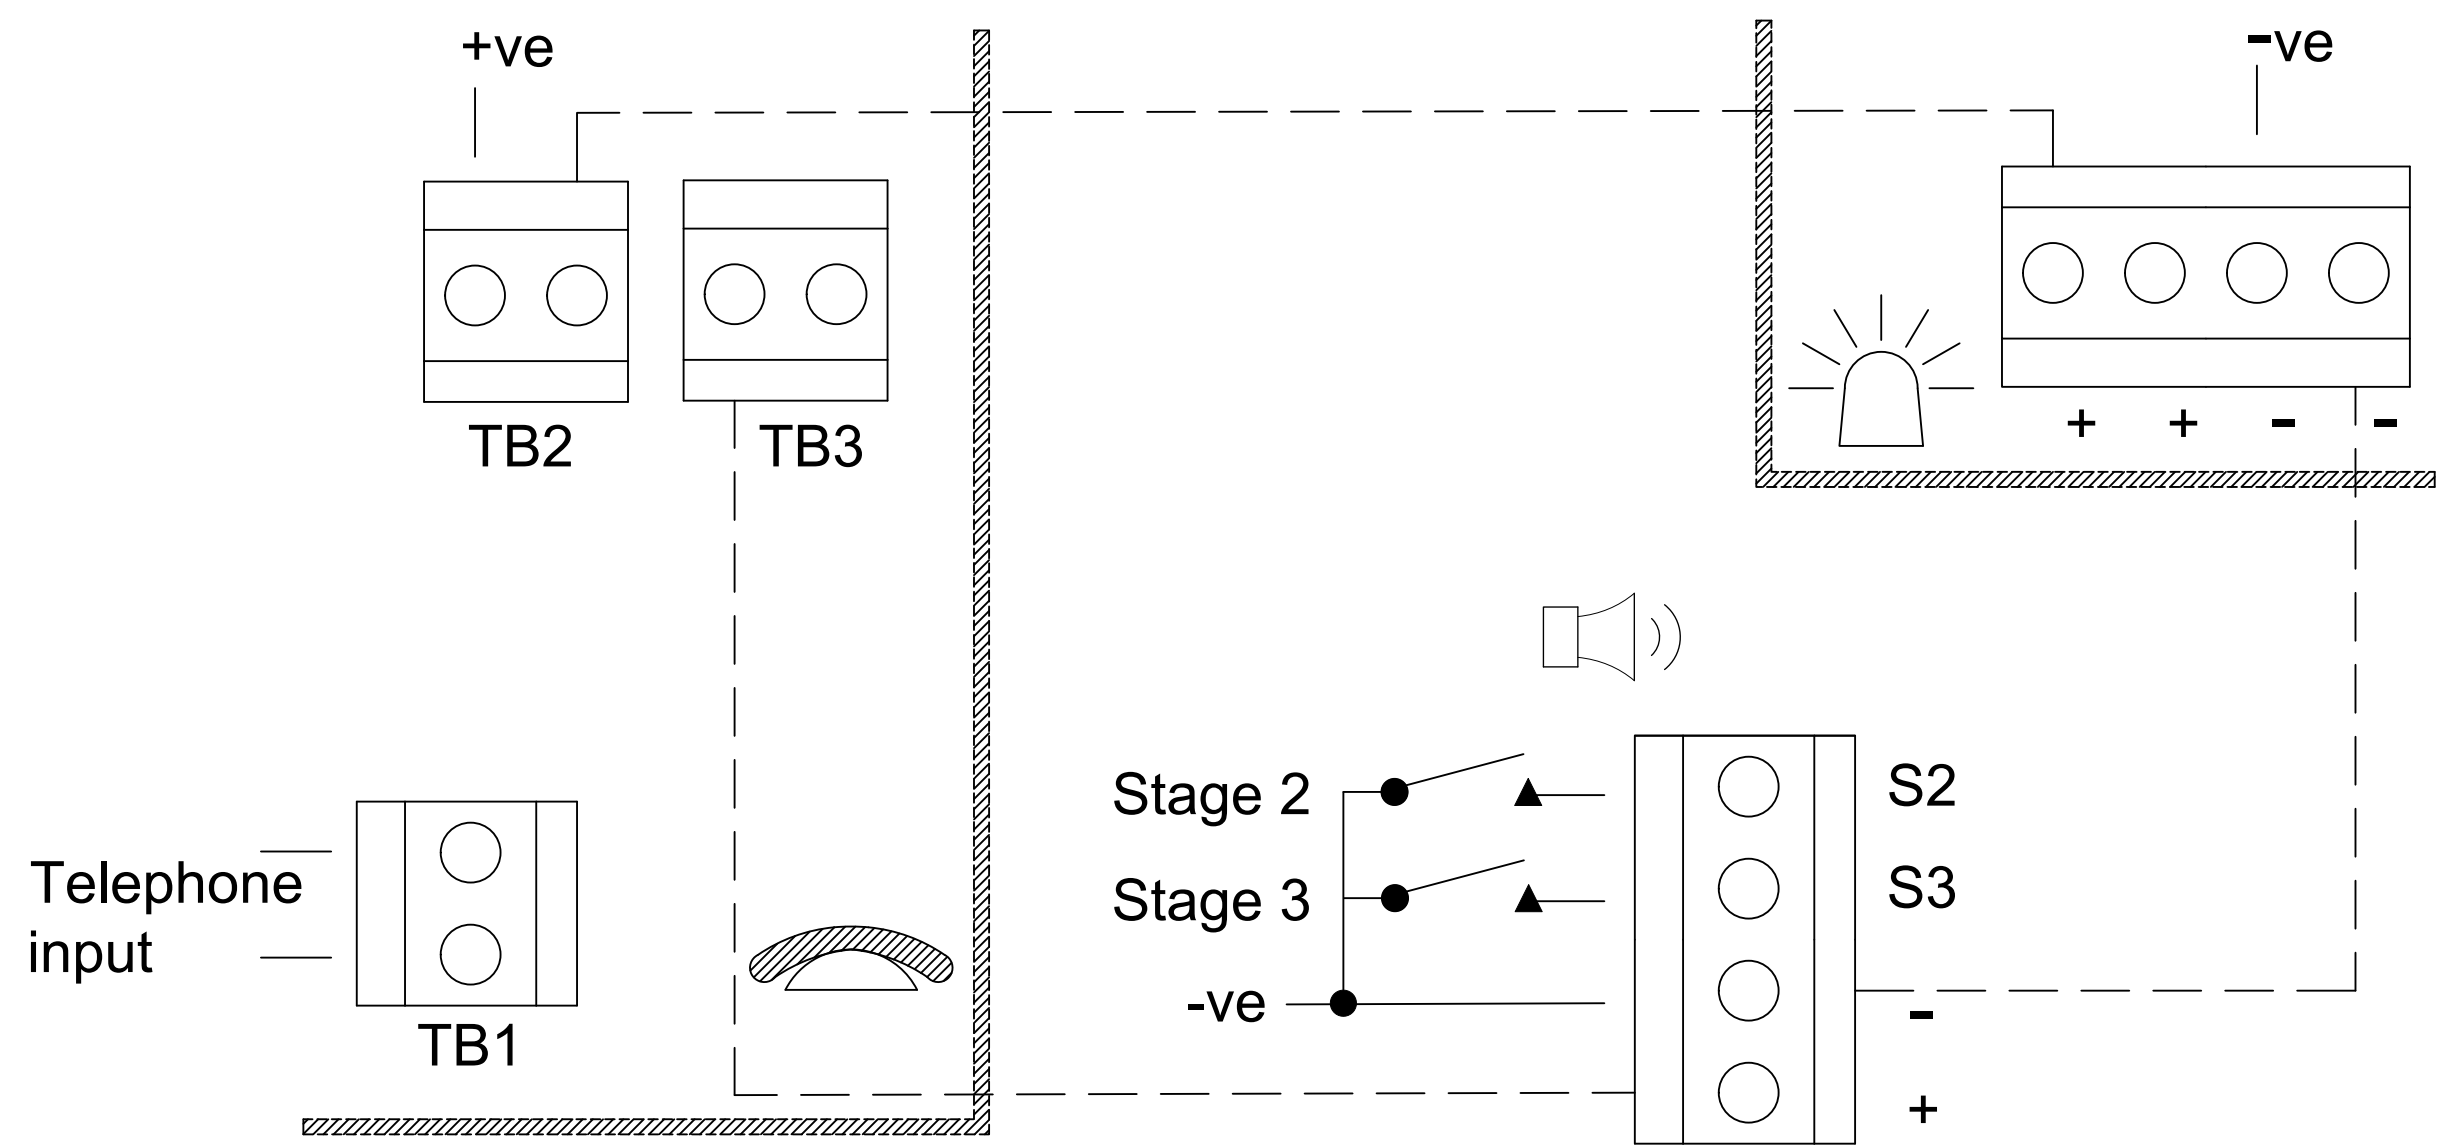

DRAWING TO BS8888:2000
 GEOMETRIC TOLERANCES TO ISO1101:1983
 LINEAR DIMENSIONAL TOLS
 ANGULAR DIMENSIONAL TOLS

DRAWN	DATE
R.S.RAIT	13/09/2022
CHECKED	DATE
B.ISARD	13/09/2022
APPROVED	DATE
R.N.POTTS	13/09/2022

SURFACE FINISH	WEIGHT (Kg)
MATERIAL	
ALTERNATIVE MATERIAL	

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER THEREIN IS COMMUNICATED IN CONFIDENCE AND IS THE COPYRIGHT PROPERTY OF EUROPEAN SAFETY SYSTEMS LTD. NEITHER THE WHOLE OR ANY EXTRACT MAY BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING OR TENDERING PURPOSES WITHOUT THEIR WRITTEN CONSENT.

© EUROPEAN SAFETY SYSTEMS LTD. AS PER LATEST DATE OF ISSUE SHOWN ABOVE

EUROPEAN SAFETY SYSTEMS LTD
 IMPRESS HOUSE
 MANSELL ROAD
 ACTON
 LONDON W3 7QH
 WWW.E2S.COM

ALL DIMENSIONS IN MM IF IN DOUBT, ASK - DO NOT SCALE			A3
TITLE BExCTS110D SOUNDER/BEACON WIRING DIAGRAMS			
SCALE	SHEET	DRAWING NUMBER	
NTS	1 OF 1	D210-06-681	