



ISSUE	MOD No.	REASON - INITIAL - DATE
1		INTRODUCTION RSR - 13/09/2022

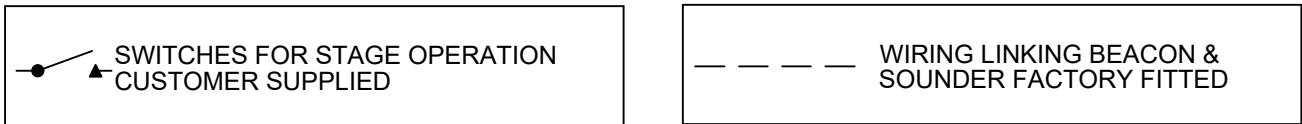

Standard Configuration, Factory Wired (Beacon & Sounder to be operate Simultaneously) Config.: 1a

Apply power to Live & Neutral terminals
 Apply dial tone to Telephone input terminals
 For Stage 2: Power Live & Neutral terminals or telephone input terminals and connect Common to Stage 2
 For Stage 3: Power Live & Neutral terminals or telephone input terminals and connect Common to Stage 3

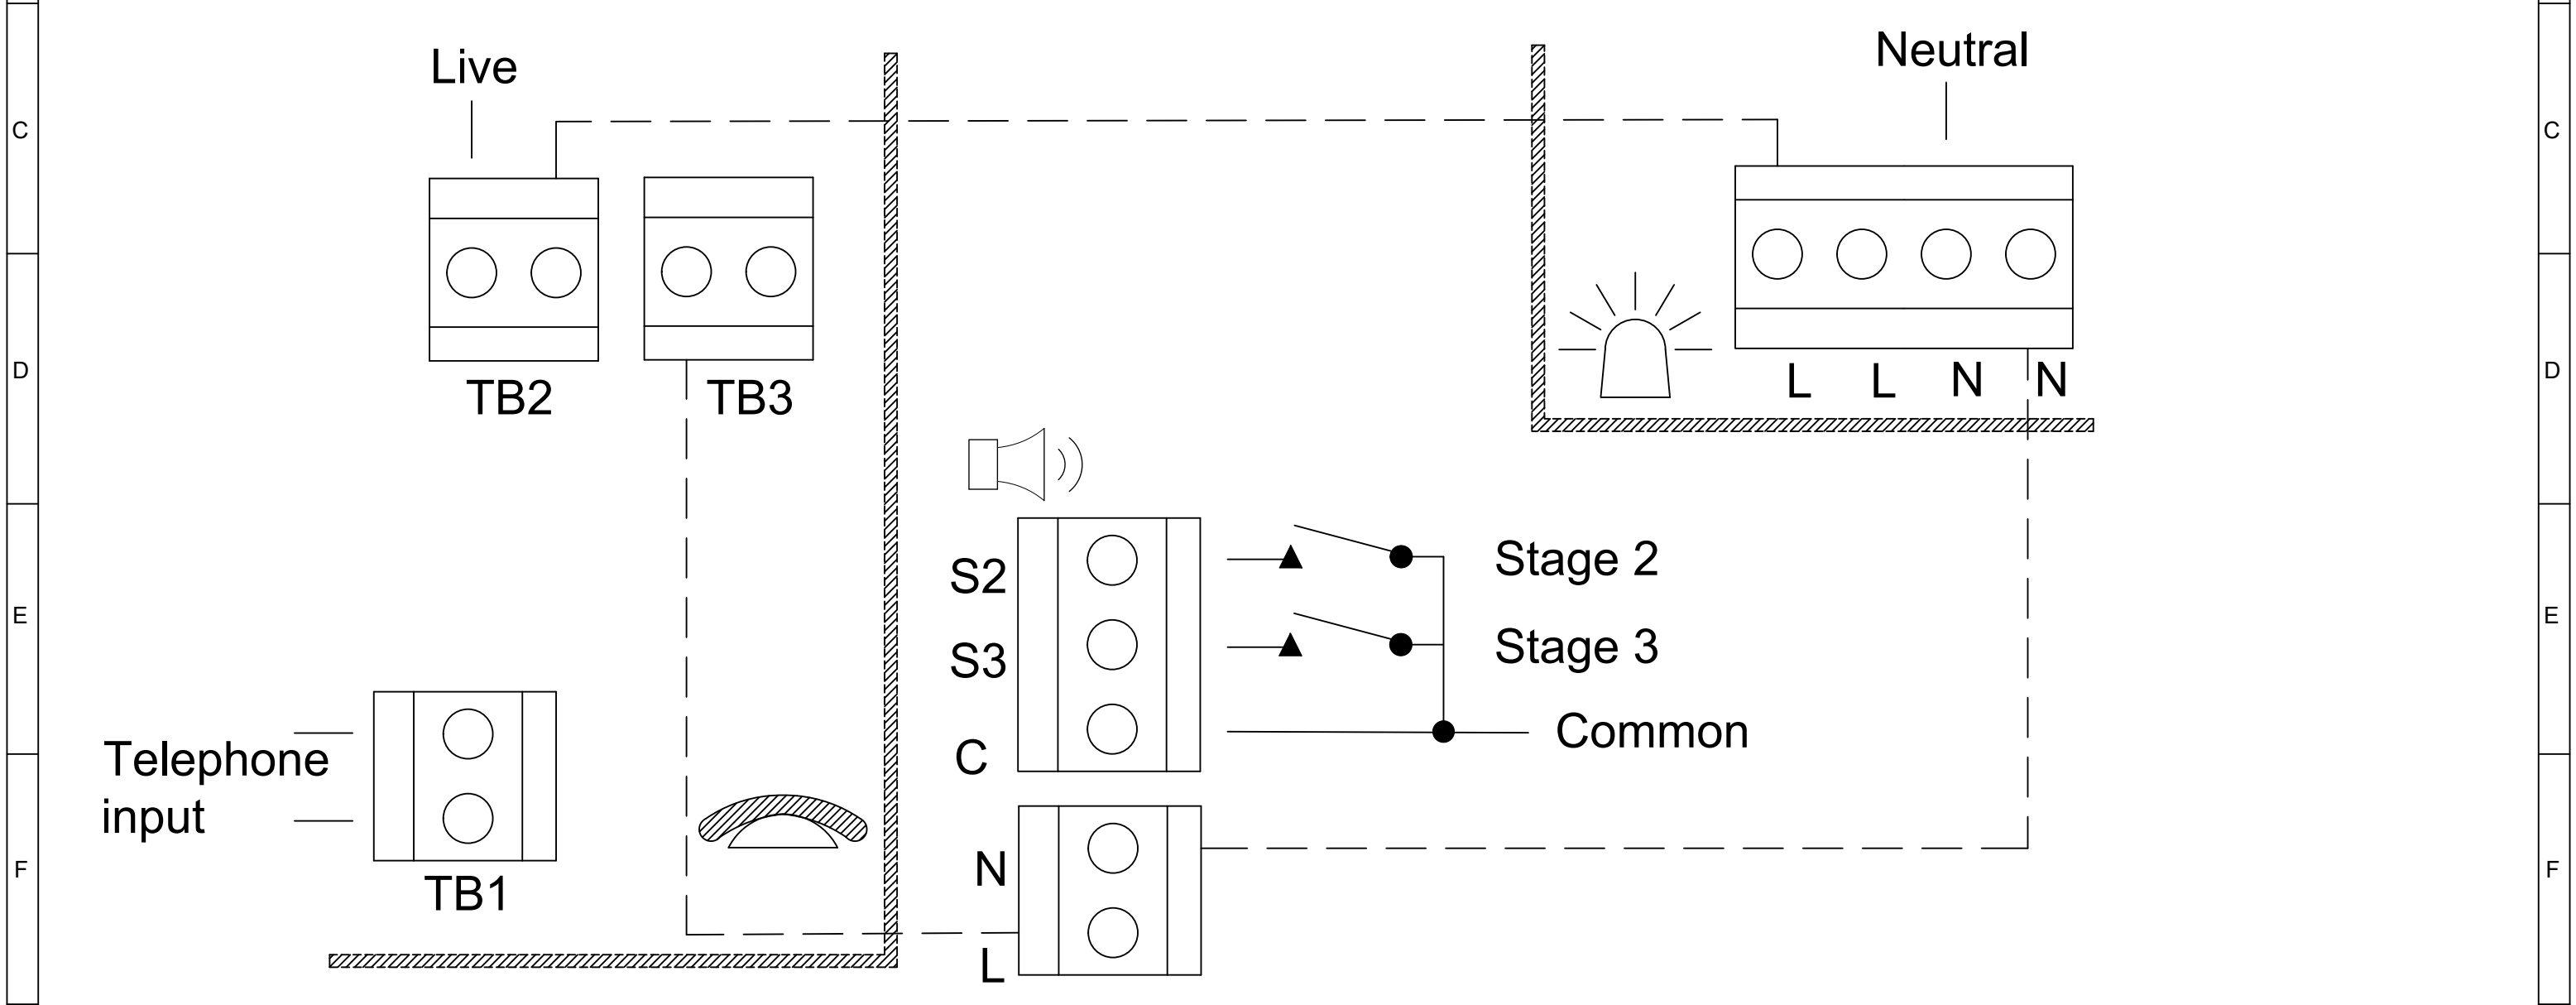

DRAWING TO BS8888:2000 GEOMETRIC TOLERANCES TO ISO1101:1983 LINEAR DIMENSIONAL TOLS ANGULAR DIMENSIONAL TOLS	DRAWN R.S.RAIT	DATE 13/09/2022	SURFACE FINISH	WEIGHT (Kg)	THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER THEREIN IS COMMUNICATED IN CONFIDENCE AND IS THE COPYRIGHT PROPERTY OF EUROPEAN SAFETY SYSTEMS LTD. NEITHER THE WHOLE OR ANY EXTRACT MAY BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING OR TENDERING PURPOSES WITHOUT THEIR WRITTEN CONSENT. © EUROPEAN SAFETY SYSTEMS LTD. AS PER LATEST DATE OF ISSUE SHOWN ABOVE	EUROPEAN SAFETY SYSTEMS LTD IMPRESS HOUSE MANSELL ROAD ACTON LONDON W3 7QH WWW.E2S.COM	ALL DIMENSIONS IN MM IF IN DOUBT, ASK - DO NOT SCALE		A3
	CHECKED B.ISARD	DATE 13/09/2022	MATERIAL	TITLE BExCTS110D SOUNDER/BEACON WIRING DIAGRAMS					
	APPROVED R.N.POTTS	DATE 13/09/2022	ALTERNATIVE MATERIAL	SCALE NTS			SHEET 1 OF 1	DRAWING NUMBER D210-06-685	
	STANDARDS BEx								