


8	9	10
ISSUE	MOD No.	REASON - INITIAL - DATE
A		INTRODUCTION RSR - 05/08/2020

OPTIONAL LINE MONITORING RESISTOR, CUSTOMER SUPPLIED,  
REQUIRED MINIMUM VALUES:  
24VDC : 1KΩ MIN, 2W MIN OR 3K9Ω MIN, 0.5W MIN  
48VDC : 3.9KΩ MIN, 2W MIN OR 15KΩ MIN, 0.5W MIN





**DC LED E2XBL2 UNITS**

**Line Monitoring**  
 Stage 1 Flash Pattern: Apply power to +ve & -ve  
 Stage 2 Flash Pattern: Apply power to +ve & -ve. Connect Stage 2 to -ve  
 Stage 3 Flash Pattern: Apply power to +ve & -ve. Connect Stage 3 to -ve

**AC LED E2XBL2 UNITS**

**Power: Live & Neutral**

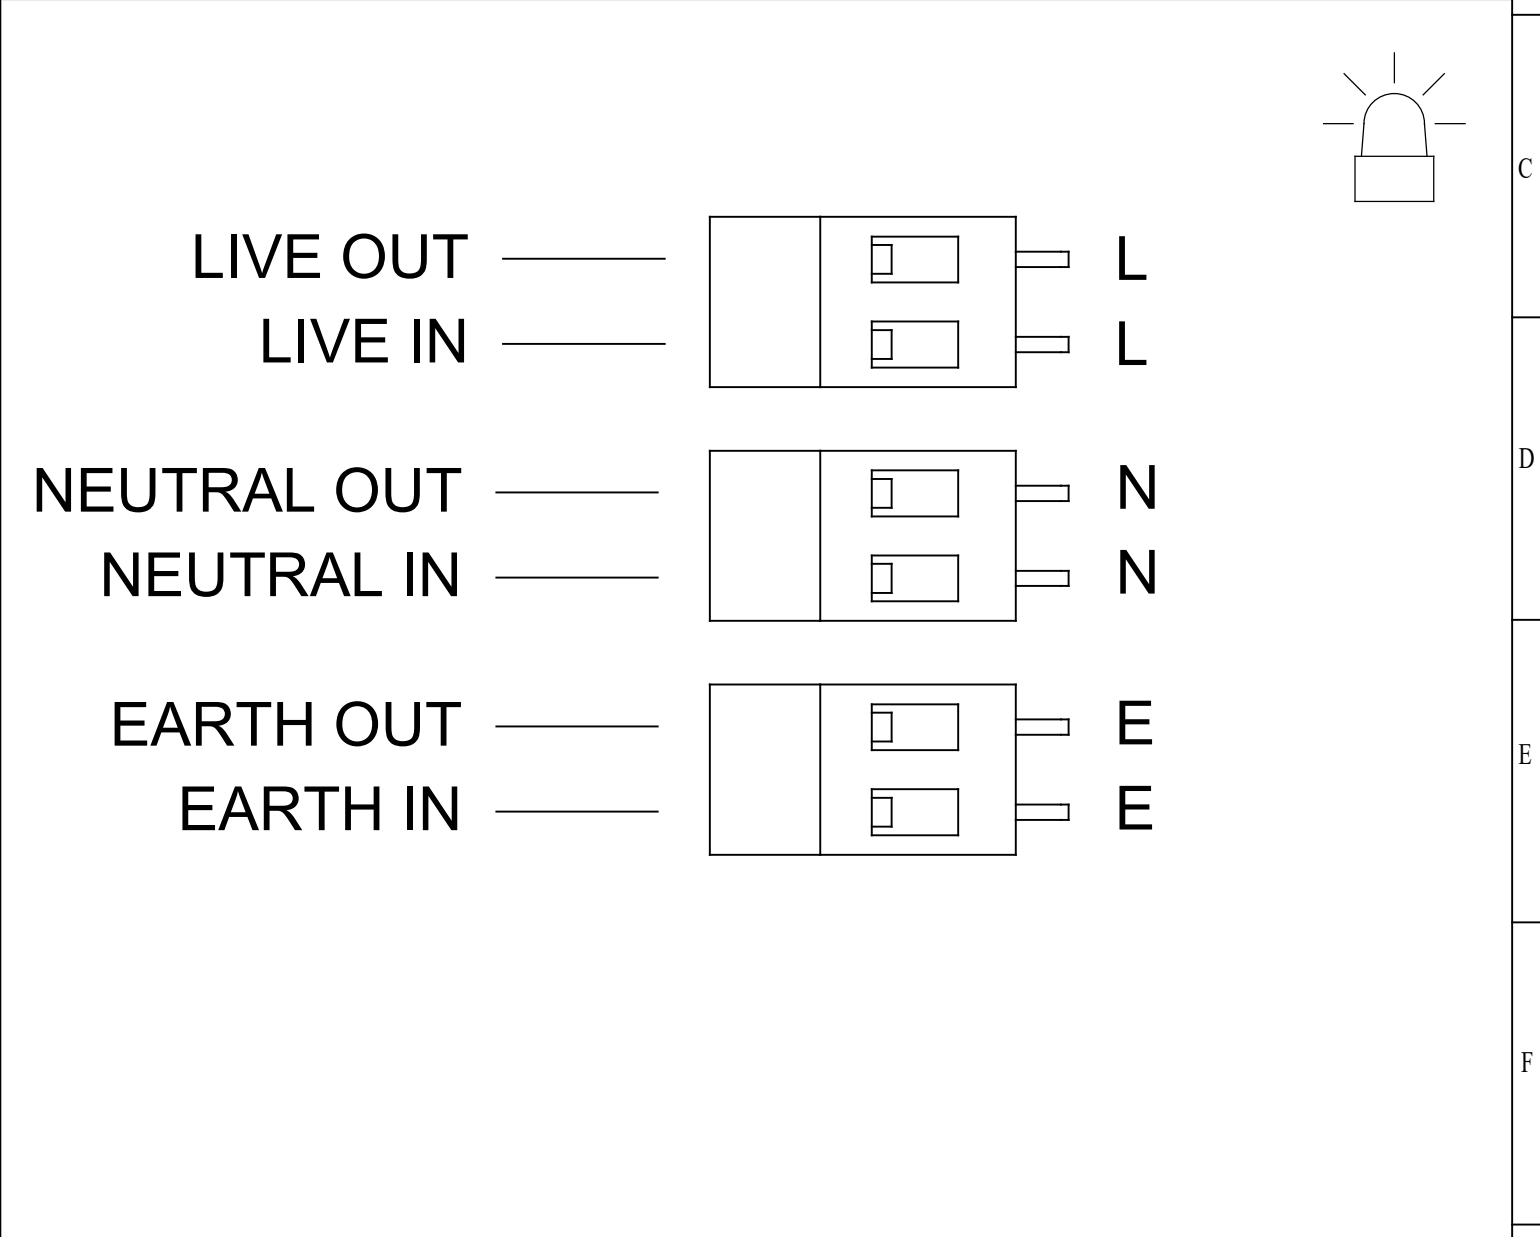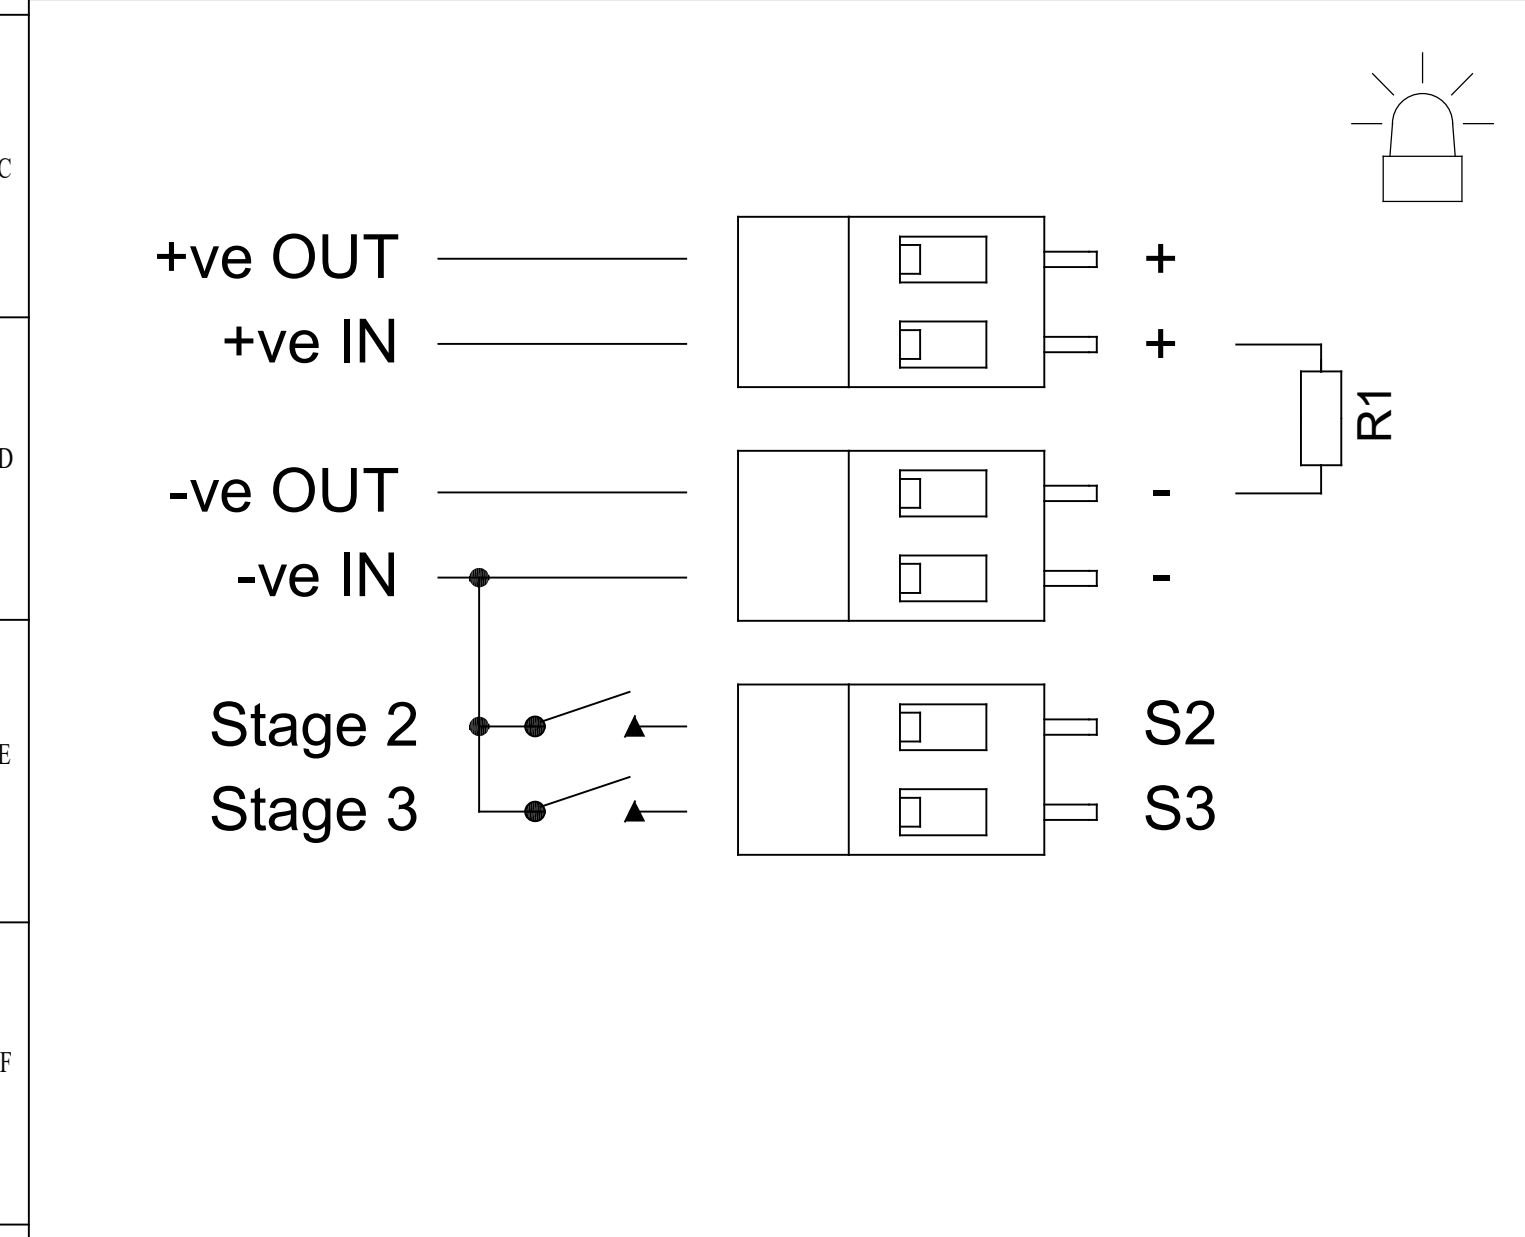

DRAWING TO BS8888:2000  
 GEOMETRIC TOLERANCES TO ISO1101:1983  
 LINEAR DIMENSIONAL TOLS  
 ANGULAR DIMENSIONAL TOLS

DRAWN R.S.RAIT DATE 05/08/2020  
 CHECKED R.N.POTTS DATE 05/08/2020  
 APPROVED R.N.POTTS DATE 05/08/2020

SURFACE FINISH WEIGHT (Kg)  
 MATERIAL  
 ALTERNATIVE MATERIAL

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER THEREIN IS COMMUNICATED IN CONFIDENCE AND IS THE COPYRIGHT PROPERTY OF EUROPEAN SAFETY SYSTEMS LTD. NEITHER THE WHOLE OR ANY EXTRACT MAY BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING OR TENDERING PURPOSES WITHOUT THEIR WRITTEN CONSENT.  
 © EUROPEAN SAFETY SYSTEMS LTD. AS PER LATEST DATE OF ISSUE SHOWN ABOVE



ALL DIMENSIONS IN MM  
 IF IN DOUBT, ASK - DO NOT SCALE  
 TITLE **E2xBL2 LED BEACON WIRING DIAGRAMS**  
 SCALE NTS SHEET 1 OF 1 DRAWING NUMBER **D209-06-401**