




D1xL1F Loudspeaker Polar Plot - 15W @ 1m

TR0800

D190-08-115 Issue B

Frequency	500Hz	1000Hz	2000Hz	4000Hz	8000Hz
Q Factor	1.9	3.1	6.0	11.0	10.9
Directivity Index	2.9	4.9	7.8	10.4	10.4
SPL at 15W @ 1m	109.7	118.3	113.4	114.6	106.4

D1xL1F Loudspeaker Polar Plot

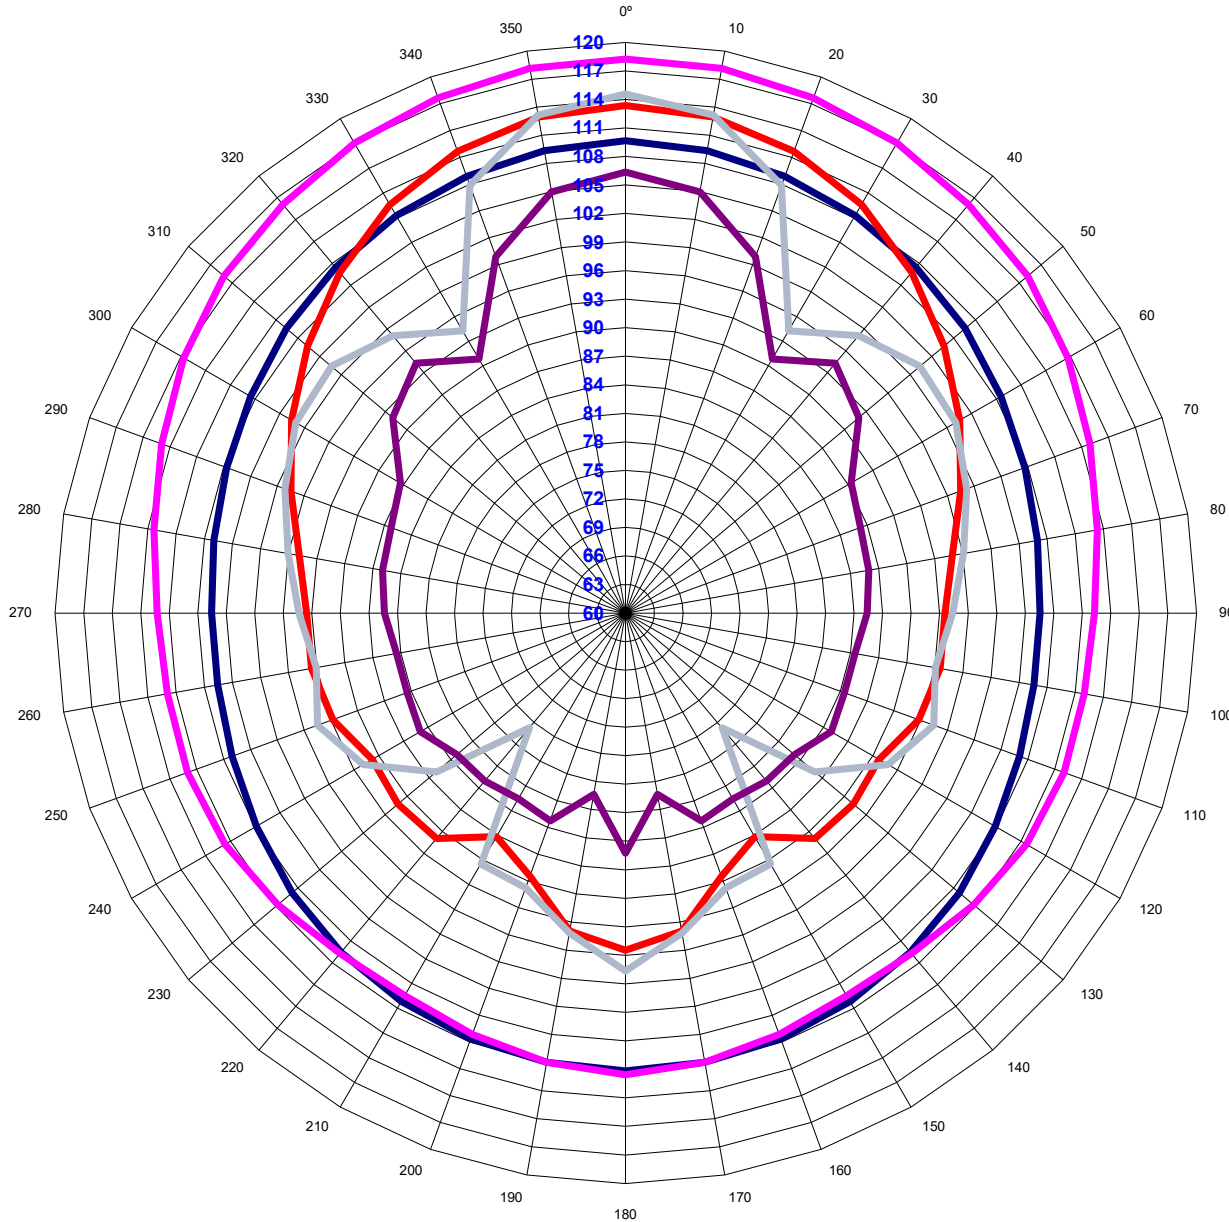

— SPL (dBA) D1xL1F 15 Watt 500Hz
— SPL (dBA) D1xL1F 15 Watt 1000Hz
— SPL (dBA) D1xL1F 15 Watt 2000Hz
— SPL (dBA) D1xL1F 15 Watt 4000Hz
— SPL (dBA) D1xL1F 15 Watt 8000Hz

Dispersion Data			
Minimum Horizontal Beam Width (1/3rd Octave)			
Mer: 0° Par: 0°			
Freq [Hz]	-9 dB Angle	-6 dB Angle	-3 dB Angle
1000	268.5°	147°	99°
2000	102°	81°	55°
4000	45°	38°	26°
8000	26°	20°	10°