




# D1xL2F Loudspeaker Polar Plot - 25W @ 1m

TR0800

D190-08-225 Issue B

Frequency	500Hz	1000Hz	2000Hz	4000Hz	8000Hz
Q Factor	3.1	2.8	6.4	13.2	13.8
Directivity Index	4.9	4.5	8.1	11.2	11.4
SPL at 25W @ 1m	108.9	120.6	112.7	112.9	107.0

## D1xL2F Loudspeaker Polar Plot

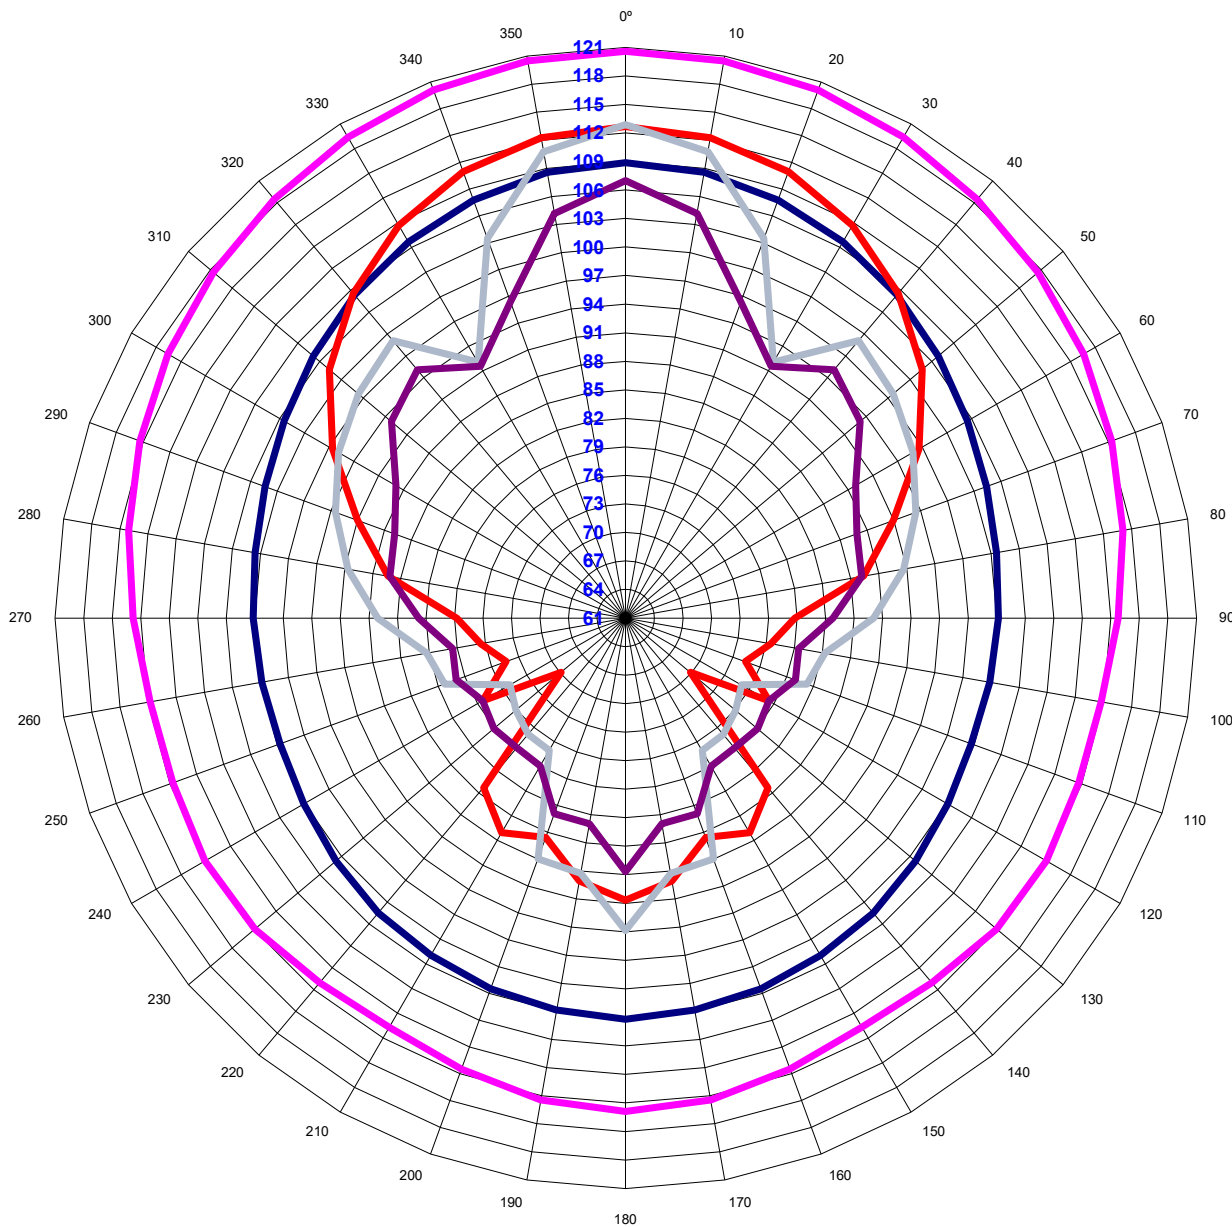

- SPL (dBA) D1xL2F 25 Watt 500Hz
- SPL (dBA) D1xL2F 25 Watt 1000Hz
- SPL (dBA) D1xL2F 25 Watt 2000Hz
- SPL (dBA) D1xL2F 25 Watt 4000Hz
- SPL (dBA) D1xL2F 25 Watt 8000Hz

### Dispersion Data

(1/1 Octave) Mer: 0° Par: 0°

Freq [Hz]	-9 dB Angle	-6 dB Angle	-3 dB Angle
500	200	114.5°	72.5°
1000	267.5°	152.5°	100°
2000	90°	73°	51.5°
4000	22.5°	31°	39°
8000	20.5°	28.5°	36°