




# D2xL2H Loudspeaker Polar Plot - 25W @ 1m

TR0801

D252-08-325 Issue B

Frequency	500Hz	1000Hz	2000Hz	4000Hz	8000Hz
Q Factor	5.9	5.4	9.4	6.7	8.6
Directivity Index	7.7	7.3	9.7	8.3	9.3
SPL at 25W @ 1m	117.1	124.7	121.5	111.9	111.3

### D2xL2H Loudspeaker Polar Plot

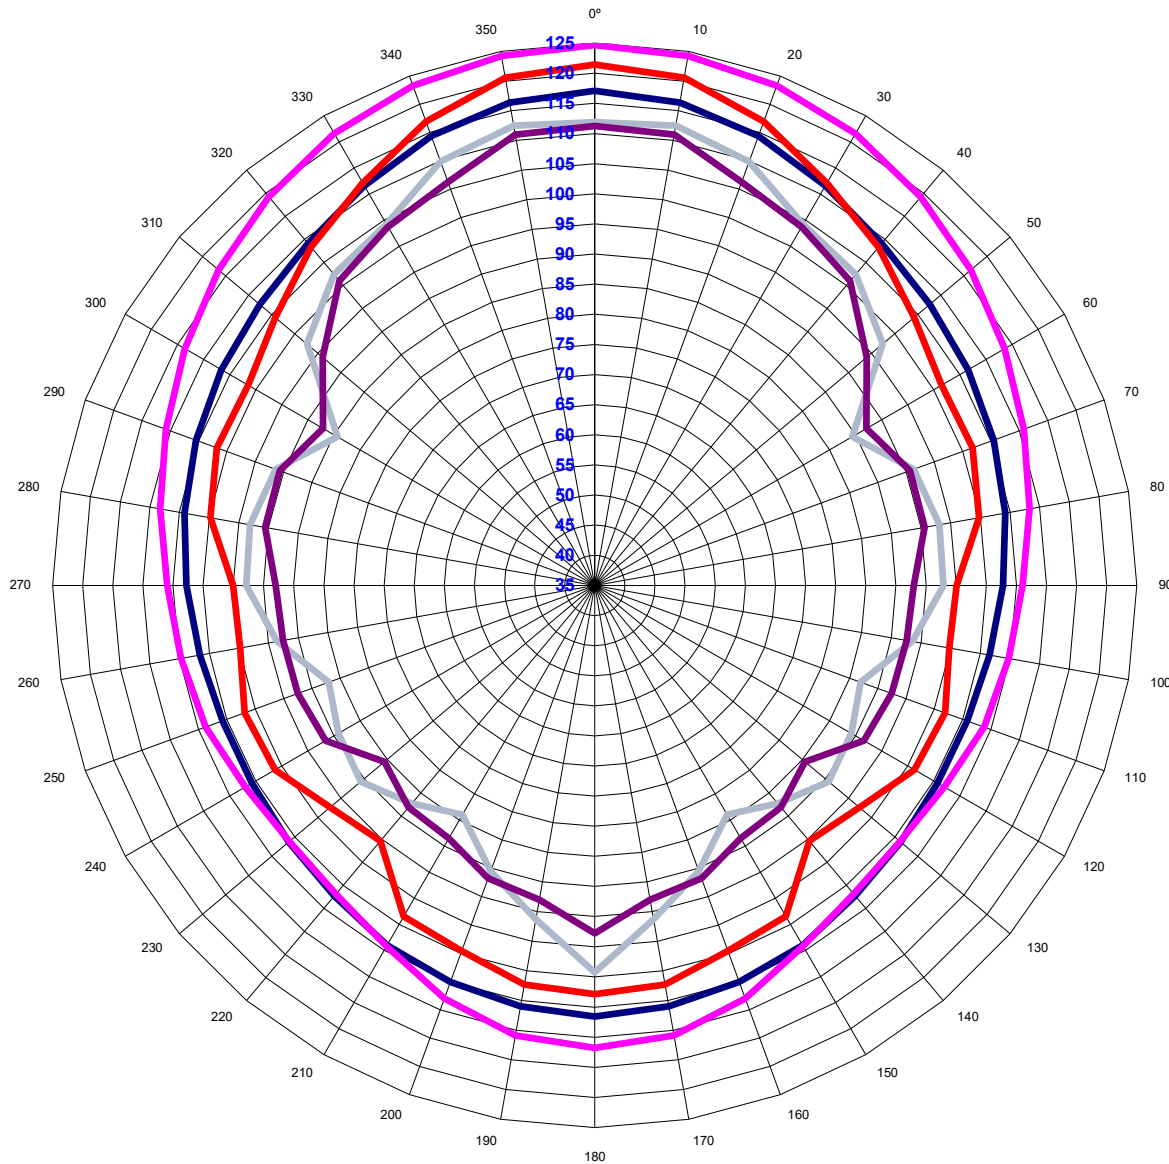

- SPL (dBA) D2xL2H 25 Watt 500Hz
- SPL (dBA) D2xL2H 25 Watt 1000Hz
- SPL (dBA) D2xL2H 25 Watt 2000Hz
- SPL (dBA) D2xL2H 25 Watt 4000Hz
- SPL (dBA) D2xL2H 25 Watt 8000Hz

Dispersion Data (1/1 Octave) Mer: 0° Par: 0°			
Freq [Hz]	-9 dB Angle	-6 dB Angle	-3 dB Angle
500	93°	64°	42°
1000	106°	84°	59°
2000	58°	46°	32°
4000	74°	54°	44°
8000	70°	48°	32°