



STExL2F Loudspeaker Polar Plot - 25W @ 1m

TR0811

D199-08-235 Issue B

Frequency

500Hz

1000Hz

2000Hz

4000Hz

8000Hz

Q Factor

3.2

2.9

7.0

13.3

12.9

Directivity Index

5.0

4.6

8.5

11.2

11.1

SPL at 25W @ 1m

112.7


122.0

119.2

111.5

105.7

STExL2F Loudspeaker Polar Plot

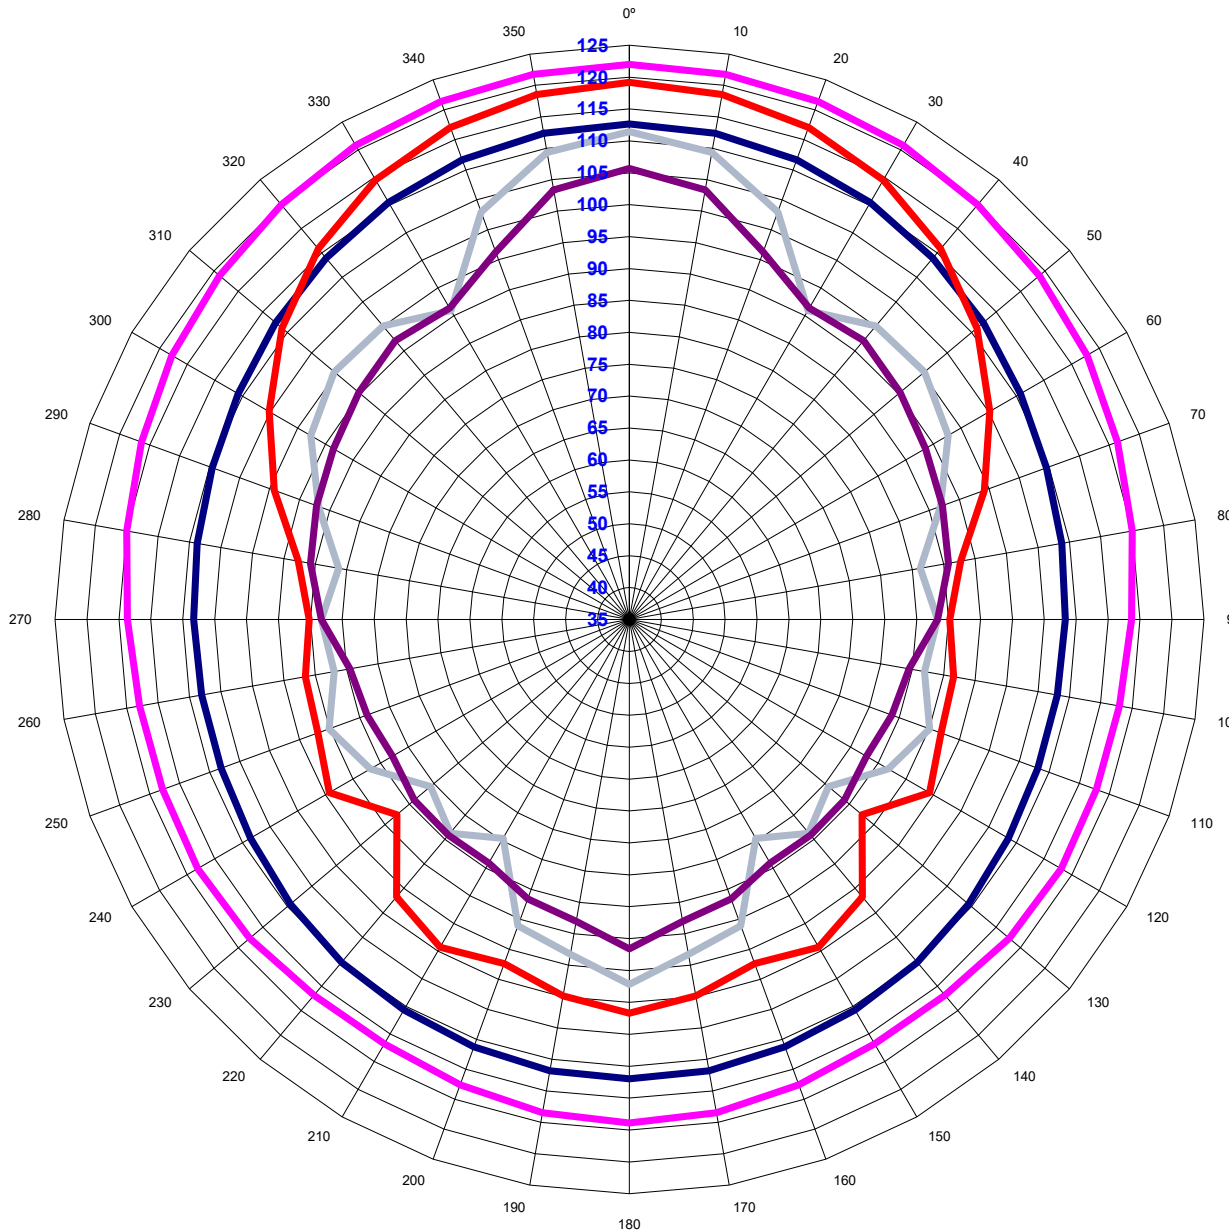

- SPL (dBA) STExL2F 25 Watt 500Hz
- SPL (dBA) STExL2F 25 Watt 1000Hz
- SPL (dBA) STExL2F 25 Watt 2000Hz
- SPL (dBA) STExL2F 25 Watt 4000Hz
- SPL (dBA) STExL2F 25 Watt 8000Hz

Dispersion Data			
(1/1 Octave) Mer: 0° Par: 0°			
Freq [Hz]	-9 dB Angle	-6 dB Angle	-3 dB Angle
500	164°	109°	71°
1000	200°	146°	98°
2000	83°	68°	47°
4000	41°	32°	23°
8000	39°	30°	22°