




E2xL25F Loudspeaker Polar Plot - 25W @ 1m

TR0821

D209-08-225 Issue B

Frequency	500Hz	1000Hz	2000Hz	4000Hz	8000Hz
Q Factor	3.6	3.0	6.9	12.5	7.7
Directivity Index	5.6	4.8	8.4	11.0	8.9
SPL at 25W @ 1m	114.8	121.8	121.0	120.8	112.5

E2xL25F Loudspeaker Polar Plot

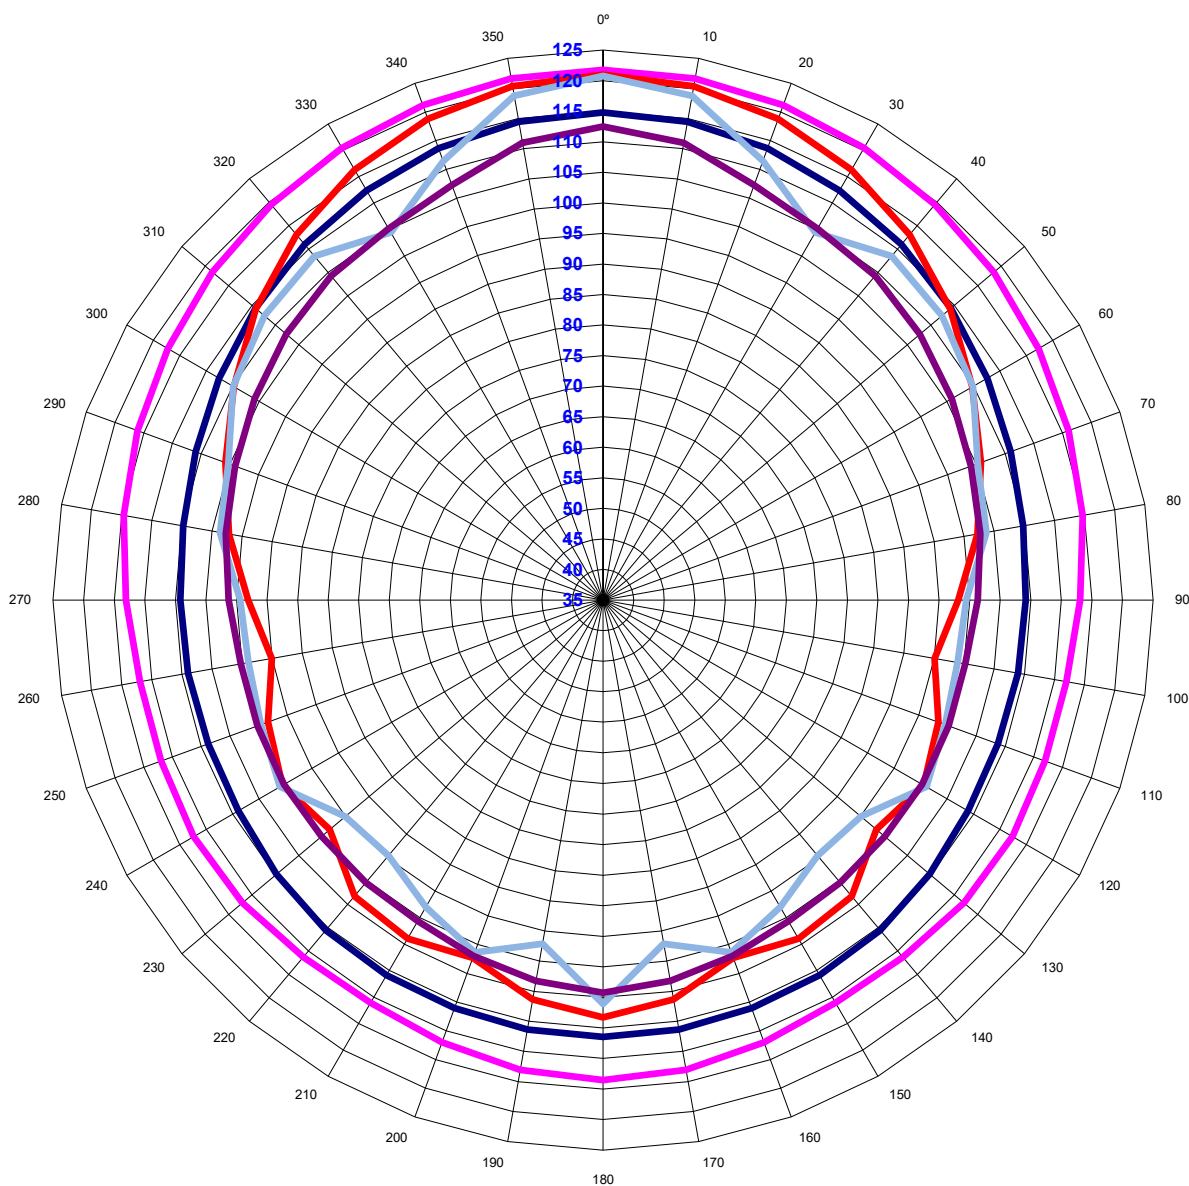

- SPL (dBA) E2xL25F 25 Watt 500Hz
- SPL (dBA) E2xL25F 25 Watt 1000Hz
- SPL (dBA) E2xL25F 25 Watt 2000Hz
- SPL (dBA) E2xL25F 25 Watt 4000Hz
- SPL (dBA) E2xL25F 25 Watt 8000Hz

Dispersion Data (1/1 Octave) Mer: 0° Par: 0°			
Freq [Hz]	-9 dB Angle	-6 dB Angle	-3 dB Angle
500	143°	106°	69°
1000	186°	144°	94°
2000	86°	68°	46°
4000	39°	31°	23°
8000	90°	48°	28°