
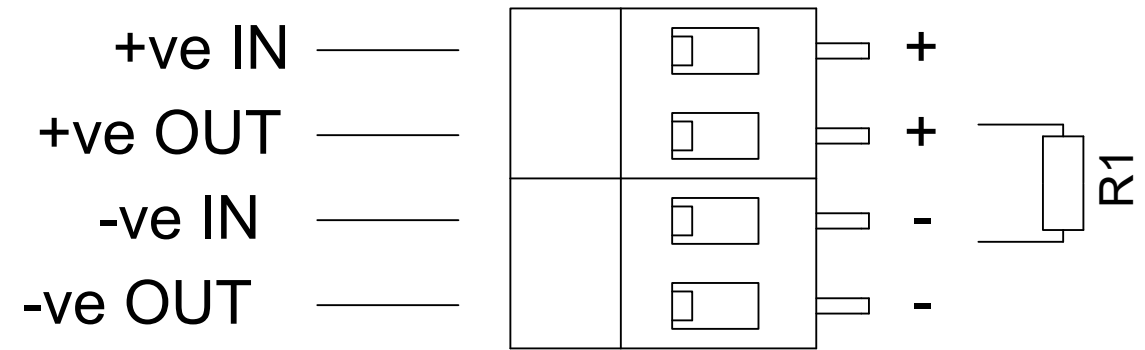


1	2	3	4	5	6	7	8	9	10
							ISSUE	MOD No.	REASON - INITIAL - DATE
							A	ACN0162	INTRODUCTION RSR 06/01/2025

DC XENON D1xB2XH1 & D1xB2XH2 UNITS
Line Monitoring
Power: +ve & -ve

OPTIONAL LINE MONITORING RESISTOR, CUSTOMER SUPPLIED,
 RECOMMENDED MINIMUM VALUES:
 500Ω MIN, 2W MIN OR 3K3Ω MIN, 0.5W MIN



DRAWING TO BS8888:2000 GEOMETRIC TOLERANCES TO ISO1101:1983 LINEAR DIMENSIONAL TOLS ANGULAR DIMENSIONAL TOLS	DRAWN	DATE	SURFACE FINISH	WEIGHT (Kg)	THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER THEREIN IS COMMUNICATED IN CONFIDENCE AND IS THE COPYRIGHT PROPERTY OF EUROPEAN SAFETY SYSTEMS LTD. NEITHER THE WHOLE OR ANY EXTRACT MAY BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING OR TENDERING PURPOSES WITHOUT THEIR WRITTEN CONSENT. © EUROPEAN SAFETY SYSTEMS LTD. AS PER LATEST DATE OF ISSUE SHOWN ABOVE		ALL DIMENSIONS IN MM			A3
	R.S.RAIT	06/01/2025					IF IN DOUBT, ASK - DO NOT SCALE			
	CHECKED	DATE	MATERIAL				TITLE D1xB2XH1 & D1xB2XH2 BEACON WIRING DIAGRAM			
	R.N.POTTS	06/01/2025					ALTERNATIVE MATERIAL		SCALE	SHEET
STANDARDS	APPROVED	DATE								
D1xB2XH BEACONS	R.N.POTTS	06/01/2025						NTS	1 OF 1	D190-06-251